

 EXCEL CELL ELECTRONIC CO., LTD.	NO.	A31229		
SPECIFICATION	Edition	4	Page	1

ECS - INDUSTRIAL CONTROL SWITCH PILOT LAMP

1. FEATURES

- Detachable contact block for easy installation and removal. It can meet variety of needs and improve work efficiency.
- IP65 waterproof type. It is designed for liquid and oil prevention and enables to be used in different environment.
- In accordance with the standards of UL, cUL, CE, CCC, and TUV.
- RoHS Compliant
- Halogen Free series available

2. SPECIFICATIONS

2-1. LED

2-1-1. LED type	BA9S-T8
2-1-2. Durability [ref.]	Approx. 50,000 Hrs.
2-1-3. Voltage mark	Printed on the LED
2-1-4	


Rated voltage	Rated current(±10% mA)
6V AC/DC	12 mA (Red /Yellow) 10 mA (Blue /Green /White)
12V AC/DC	18 mA (Red /Yellow) 16 mA (Blue /Green /White)
24V AC/DC	10 mA
110V AC	2 mA
220V AC	1 mA

2-2. MECHANICAL AND ENVIRONMENTAL

2-2-1. Operating temperature	-25℃ ~ +55℃ (without icing or condensation)
2-2-2. Storage temperature	-40℃ ~ +85℃
2-2-3. Humidity	45% ~ 85% RH
2-2-4. Degree of protection	IP65 (from the front of the panel)
2-2-5. Degree of contamination	3 (IEC 60947-5-1)
2-2-6. Vibration resistance	10-55Hz single amplitude 0.5mm
2-2-7. Shock resistance	1000 m/s ² (100G)(destruction)
2-2-8. Connection type	M3.5 screw connection

ECE	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A31229		
SPECIFICATION		Edition	4	Page	2

3. CONSTRUCTION

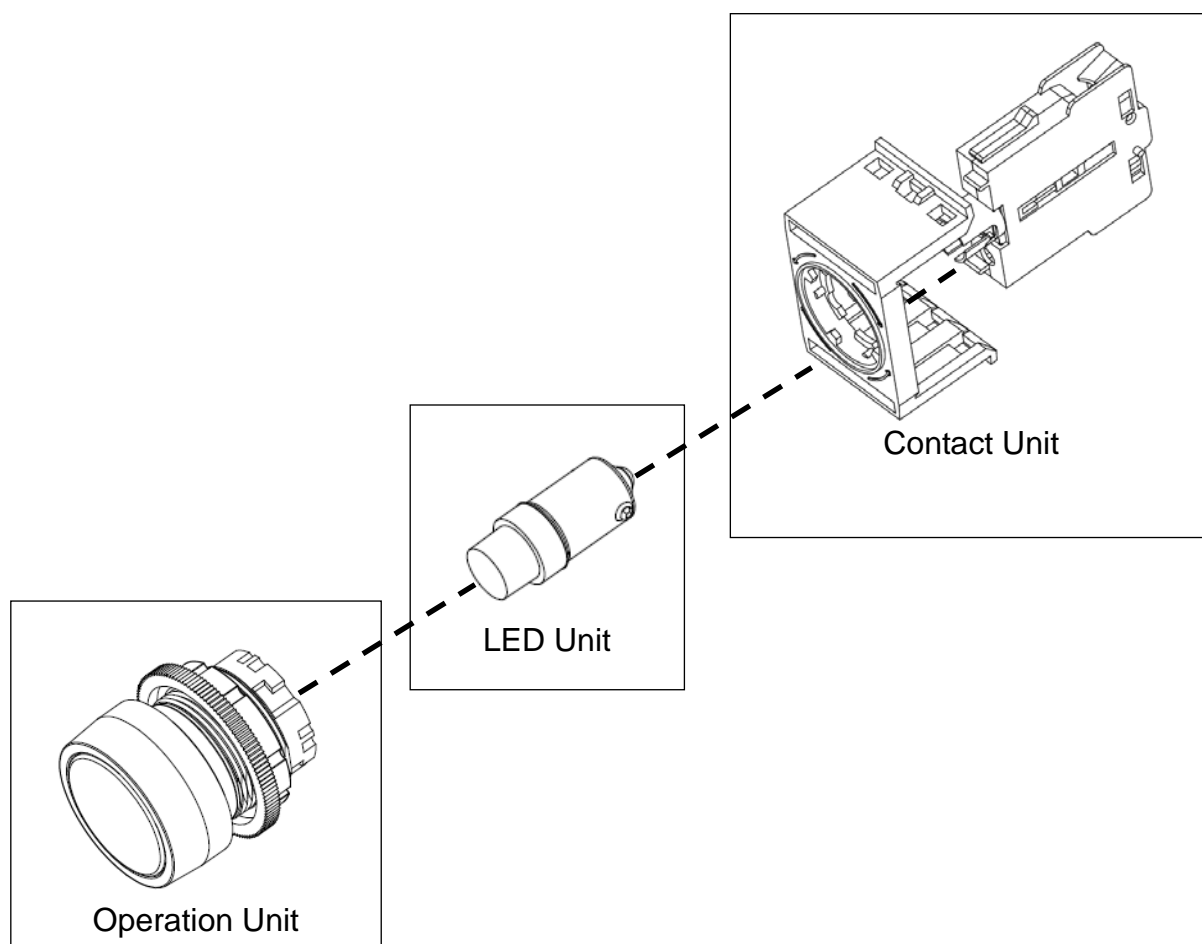

- Operation unit, LED unit, and contact unit (contact blocks) can be sold separately.
- Please see [4.Part numbering system] for operation unit part number. For other accessories (LED lamp, contact block, etc.), please refer to accessory part in catalog.

	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A31229		
SPECIFICATION		Edition	4	Page	3

4. PART NUMBERING SYSTEM

ECS - XX X L 1 R X - 0 0 2 0 X - L XX R

Lamp color: R(Red) / Y(Yellow) / B(Blue)
G(Green) / W(White)

Applied voltage: 06: 6V AC/DC
12: 12V AC/DC
24: 24V AC/DC
A1: 110V AC
A2: 220V AC

Lamp type: L: LED

Special number:

Blank or 0~9 or A~Z

H: Halogen Free series

Contact block special number:

0: Standard holder, Contact block

Function:

2: lamp modular

Contact configuration:

00: without contact blocks

Operator special number:

Blank: n/a

N: key recess type (Ø 22 mm only)

Cover color: R(Red) / Y(Yellow) / B(Blue) / G(Green)
W(White) / O(Orange)

Type:

1: Low-profile type

3: Extended type

Operator:

L: Pilot Lamp

Appearance:

R: Round

Q: Square (only for Ø 22 & Ø 25 mm)

Mounting hole dia. :

22: Ø 22 mm

25: Ø 25 mm

30: Ø 30 mm

Series: ECS: Industrial Control Switch

	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A31229		
SPECIFICATION		Edition	4	Page	4

5. INSTALLATION

5-1. Panel thickness


- The panel thickness must be 1 to 7 mm.
- Take into consideration about the thickness of accessories (such as name plate, switch guard, etc.) while using.

5-2. Panel cutout

- Cutout diameter and distance

Unit: mm


	22R / 25R	22Q / 25Q	30R
A	22.3/25.3 $\begin{smallmatrix} +0.4 \\ -0 \end{smallmatrix}$	22.3/25.3 $\begin{smallmatrix} +0.4 \\ -0 \end{smallmatrix}$	30.5 $\begin{smallmatrix} +0.5 \\ -0 \end{smallmatrix}$



Unit: mm

	22R / 25R	22Q / 25Q	30R	Long Lever Selector Switch Emergency Stop Switch
X	30	32	50	50
Y	50	50	65	50


- Key recess cutout (Ø 22mm only)



Unit: mm


Mounting Hole(Ø)	a	b
22	24.1 $\begin{smallmatrix} +0.5 \\ -0 \end{smallmatrix}$	3.2 $\begin{smallmatrix} +0.2 \\ -0 \end{smallmatrix}$

- Panel installation

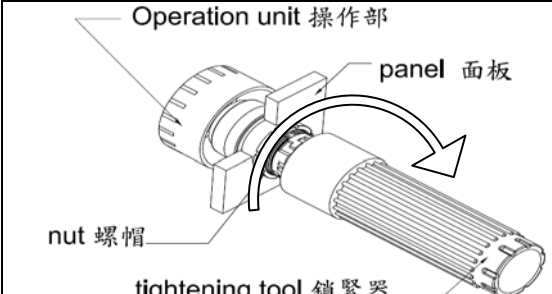

1. Place the operation unit through panel mounting hole.
2. Install the nut by using tightening tool.
3. Make sure the operation unit fix on the panel firmly.


5-3. Operation unit and contact unit installation

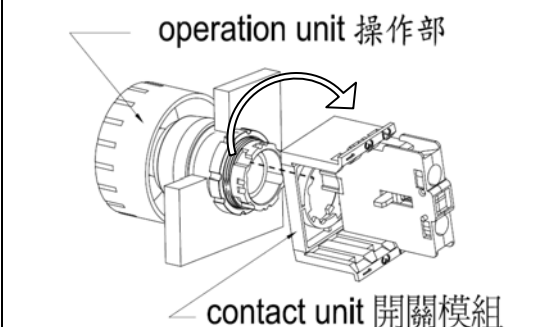


1. Fix the operation unit on the panel.
2. Connect the operation unit with snap-fit joint part of contact unit.
3. Rotate contact unit to fix firmly as shown in the left figure.

	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A31229		
SPECIFICATION		Edition	4	Page	5

5-4. LED lamp installation

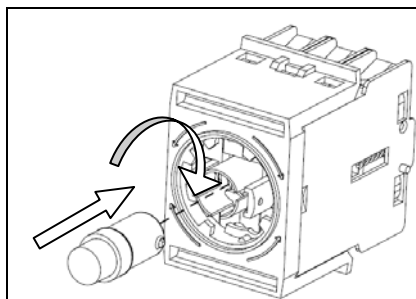

1. Aim LED lamp to the lamp holder and press down to the bottom.
2. Rotate the LED lamp to make sure the lamp is firmly installed.
3. While installation and removal, please hold the metal part of LED lamp to avoid damaging LED lamp.

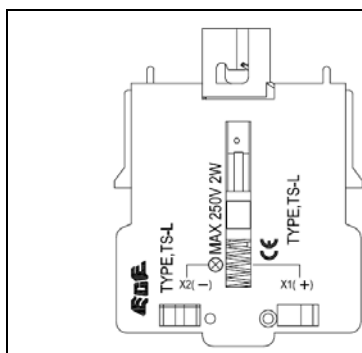

1. When using DC LED lamp, please connect the positive pole (+) to X1 terminal as shown in left figure.
2. The LED lamp may be erroneously lightened by a leaking current from the circuit. The malfunction can be prevented by connecting a shunt resistor in parallel with the LED lamp.

6. PACKAGING

6.1. ECS product is packed without assembly (packed by set), 10 sets per box.

6.2. Label information

- | | |
|-------------------|-------------------------|
| (1) part number | (6) QC inspection stamp |
| (2) Lot number | (7) Company mark |
| (3) Quantity | (8) Company name |
| (4) Tester number | (9) Notice |
| (5) Date code | |

7. DIMENSIONS

7-1. See attached drawings

8. OPTIONS

8-1. Key recess type operation unit is available (Ø 22mm only)

8-2. Ø22mm and Ø25mm type have the same structure. Different thickness of O-rings can be ordered separately to fit into Ø22mm and Ø25mm hole in the panel.

8-3. For other accessories (name plate, control box, and etc.), please refer to accessory part in the catalog.

	EXCEL CELL ELECTRONIC CO., LTD.	NO.	A31229		
SPECIFICATION		Edition	4	Page	6

9. REMARK

9-1. Safety Certification

Safery Standard	Certification
UL-508	UL / cUL , file NO. E155181
CSA C22.2 NO.14	
EN60947-5-1	R50363071
EN60947-5-5 (Emergency Stop Switch)	R50362996





9-2. CAUTION




To prevent injury, this device must be disconnected from all power sources prior to wiring and other initiating work.

Use tightening tool when installing the operation unit in the panel cutout. Do not use pliers and do not tighten excessively, otherwise the operation unit may be damaged.



Make sure contact blocks are firmly fixed on contact holder during assembly. It will avoid contact blocks separated from holder during operation.

ECS-22RL1X-0020

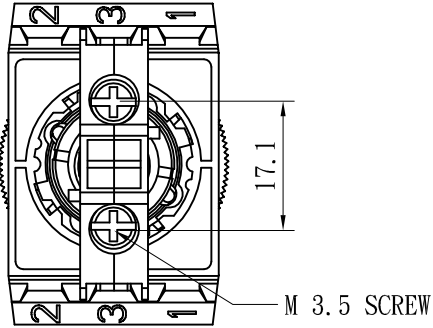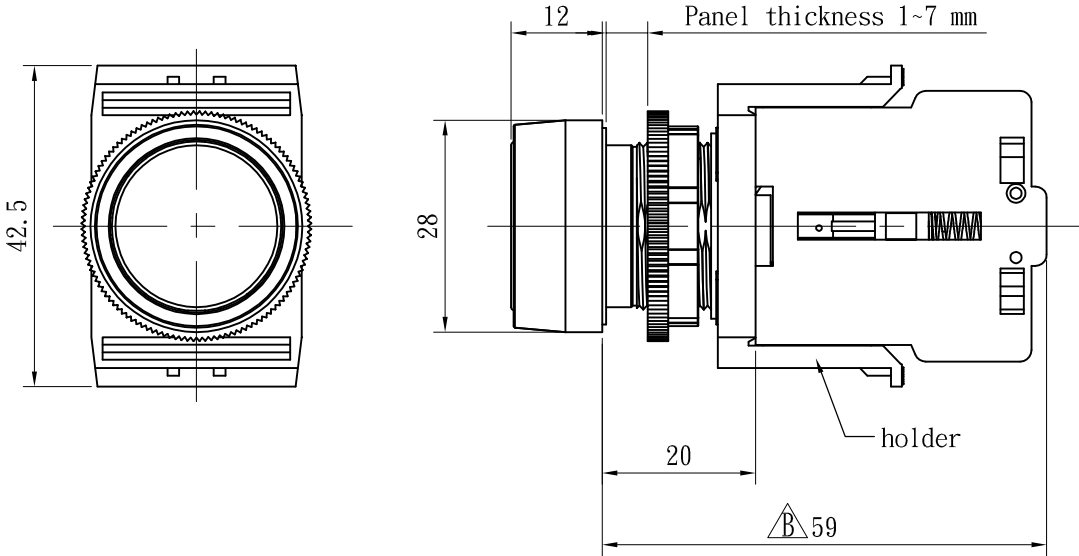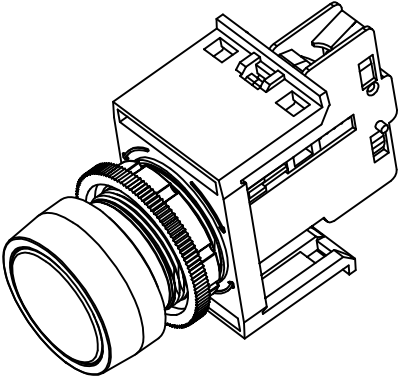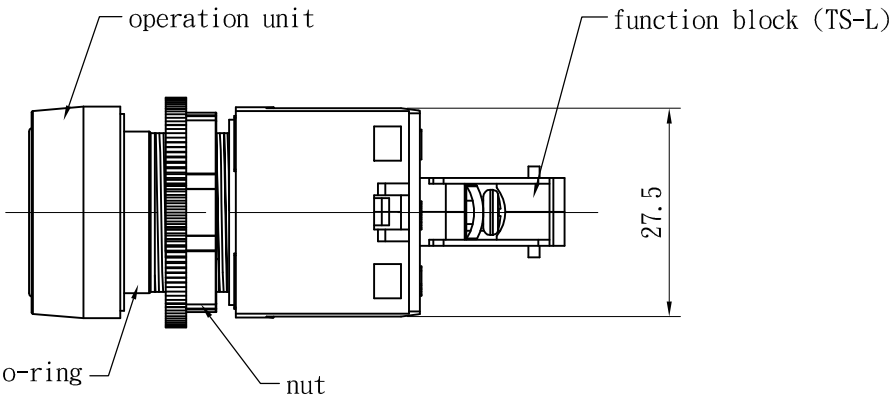

				NORMAL TOLERANCE		 EXCEL CELL ELECTRONIC CO., LTD.						PART NUMBER		ECS-22RL1X-0020							
				RANGE	TOLERANCE							UNIT		MM (INCH)		PART NAME	ECS				
				0-1	±0.1	CHECK	Marcus Li	DESIGN	Alice Lin	DRAWN	Alice Lin	SCALE	1:1	TYPE	Pilot Lamp						
				1-4	±0.3							SIZE	A4	FILE NAME	76922RLXXB.dwg						
				4-16	±0.5							PROJECTION		EDITION	B						
	Marking position changes	Alice	2018/01/25	16-63	±0.8																
				63-250	±1.0																
NO.	DETAILS	ALTERED BY	DATE																		

ECS-22RL3X-0020

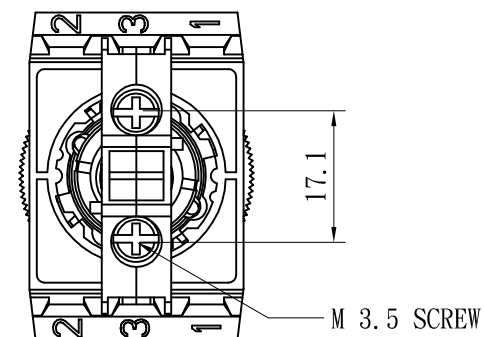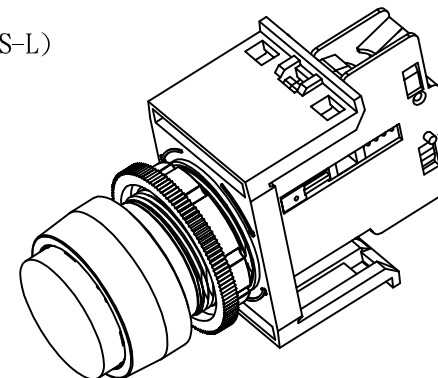[illegible]