

## EUROSTYLE P.C.B. TERMINAL BLOCK

TÜV R50002918  
E133988(R)

ETB23 SERIES

CLAMPING TYPE, 3 DECK

PITCH=5.0 / 10.0mm

### FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

### SPECIFICATIONS


- Pitch 5.0mm, 10.0mm
- Wire range 24~14 AWG (2.5mm<sup>2</sup>)
- No. of pole per block 2Px3 or 3Px3
- Rating 10 Amp, 300 VAC
- Housing PA66
- Terminals Tin plated over Brass
- Screws M2.5x0.45P, Zinc plated over Steel
- Wire cage Nickel plated over Zinc Alloy
- Torque 0.4 N-m (3.5 lb-in) (tested by manual torque screwdriver)
- Operating temperature -30°C ~+105°C (includes temperature rise limit)
- Stripping length 6mm
- UL Approval 300V, 10A, 24~14 AWG
- TUV Approval 250V, T100, 1.5mm<sup>2</sup>



### PART NUMBERING SYSTEM

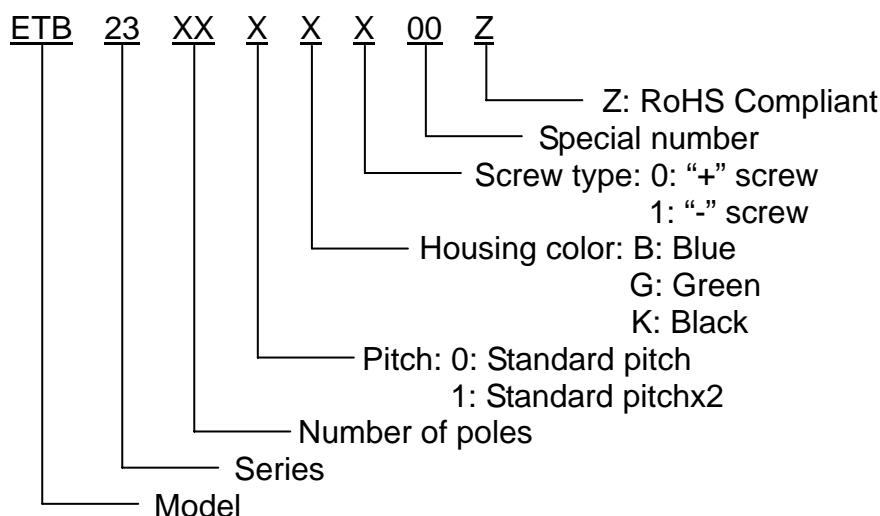

## DRAWING

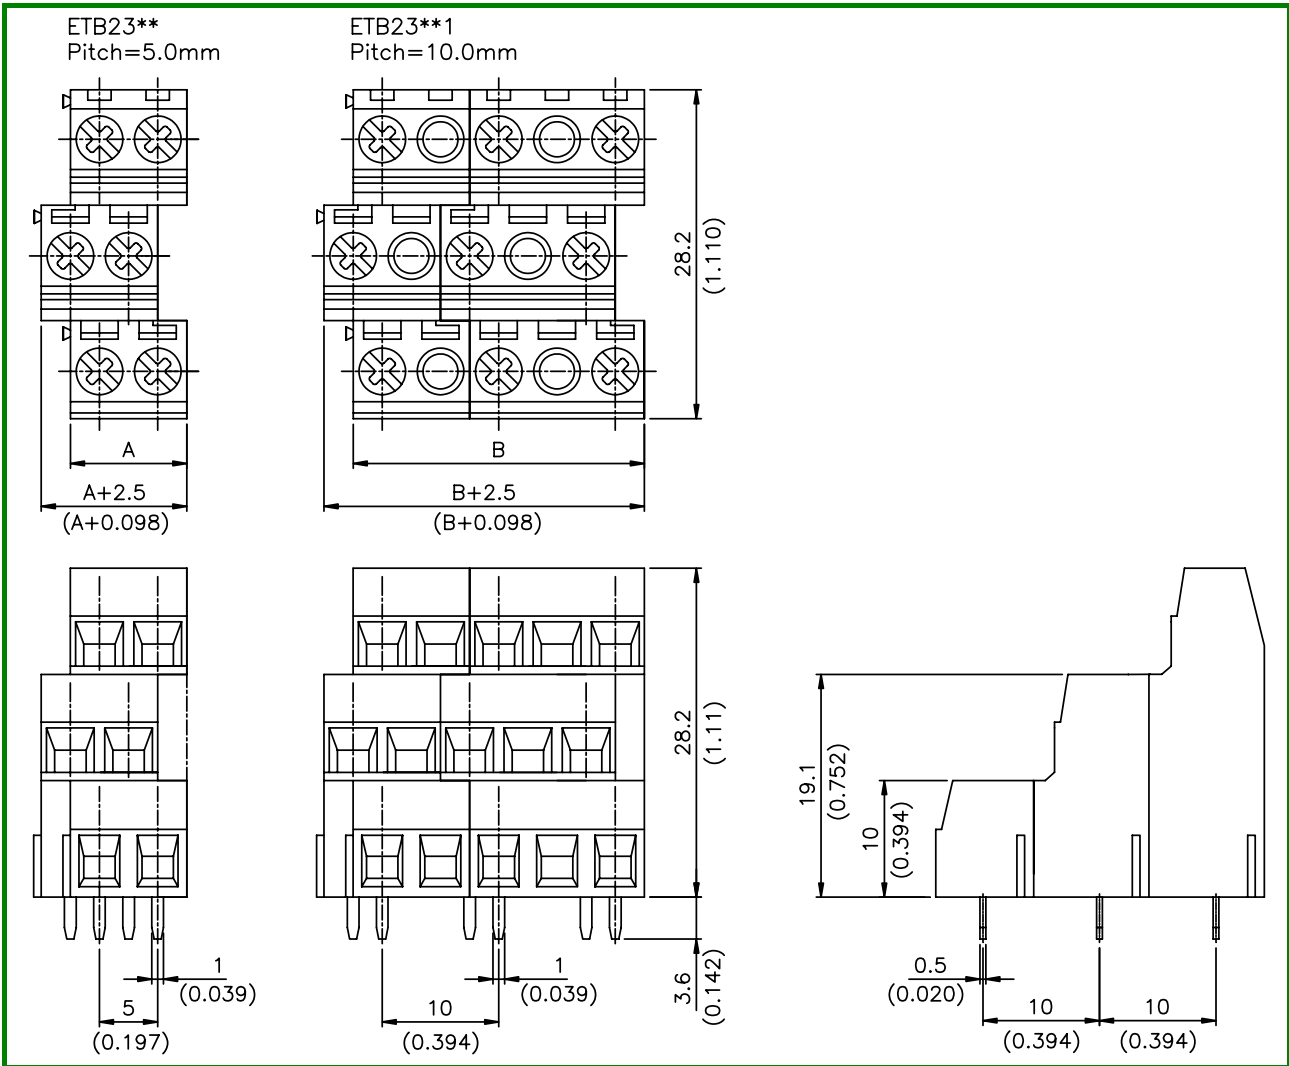

POLE DIM.	6	9	12	15	18	21	24	27	30	33	36	39
A	10 (0.394)	15 (0.591)	20 (0.787)	25 (0.984)	30 (1.181)	35 (1.378)	40 (1.575)	45 (1.772)	50 (1.969)	55 (2.165)	60 (2.362)	65 (2.559)
B	25 (0.984)	40 (1.575)	55 (2.165)	70 (2.756)	85 (3.346)	100 (3.937)	115 (4.528)	130 (5.118)	145 (5.709)	160 (6.299)	175 (6.890)	
POLE DIM.	42	45	48	51	54	57	60	63	66	69	72	
A	70 (2.756)	75 (2.953)	80 (3.150)	85 (3.346)	90 (3.543)	95 (3.740)	100 (3.937)	105 (4.134)	110 (4.331)	115 (4.528)	120 (4.724)	