| EXCEL CELL ELECTRONIC CO., LTD. | | NO. | | A312 | 254 |
|---------------------------------|---------------|---------|---|------|-----|
| | SPECIFICATION | Edition | 3 | Page | 1 |

ECS - INDUSTRIAL CONTROL SWITCH KEY SELECTOR (SMALL COMPACT SIZE)

1.FEATURES

- Up to 5 different operations.
- Detachable contact block for easy installation and removal. It can meet variety of needs and improve work efficiency.
- IP65 waterproof type. It is designed for liquid and oil prevention and enables to be used in different environment.
- Short contact unit design to save more space.
- The safety design of slide locking holder is not only for easy installation and removal, but also for prevention of inappropriate installation of contact blocks.

10A

650V

- In accordance with the standards of UL, cUL, CE, CCC, and TUV.
- RoHS Compliant
- Halogen Free series available

2.SPECIFICATIONS

- 2-1. ELECTRICAL
 - 2-1-1. Rated thermal current
 - 2-1-2. Rated insulation voltage
 - 2-1-3. Utilization category
 - 2-1-4. Minimum switching capacity [ref.]
 - 2-1-5. Dielectric strength
 - 2-1-6. Insulation resistance
 - 2-1-7. Contact resistance
- 2-2. MECHANICAL AND ENVIRONMENTAL 2-2-1. Operating temperature
 - 2-2-2. Storage temperature
 - 2-2-3. Humidity
 - 2-2-4. Degree of protection
 - 2-2-5. Degree of contamination
 - 2-2-6. Vibration resistance
 - 2-2-7. Shock resistance
 - 2-2-8. Mechanical Life
 - 2-2-9. Electrical Life
 - 2-2-10. Operation Force(from 1a1b)[ref.]

AC-15(A600) or Ue 240V / le 3A Ue 380V / le 1.9A DC-13(P600) or Ue 250V / le 0.55A 3V DC/AC, 5mA 2500V AC, 1 min. 100MΩ min. at 500V DC $50m\Omega$ max. (initial) -25°C ~ +70°C (without icing or condensation) -25° C ~ $+55^{\circ}$ C (for illuminated type) -40°C ~ +85°C 45% ~ 85% RH IP65 (from the front of the panel) 3 (IEC 60947-5-1) 10-55Hz single amplitude 0.5mm 100 m/s²(10G)(malfunction) 1000 m/s²(100G)(destruction) 500,000 operations frequency 1800 operations/hr 500,000 operations

frequency 1800 operations/hr 0.2 N-m (2- or 3- position type)


| EXCEL CELL ELECTRONIC CO., | LTD. NO. | | A312 | A31254 Page 2 | | |
|----------------------------|----------|---|------|------------------|--|--|
| SPECIFICATION | | 3 | Page | 2 | | |

2-2-11. Connection type


3.CONSTRUCTION

2-2-12. Direct opening action


M3.5 screw connection Direct opening mechanism of NC contact to open the circuit \bigcirc

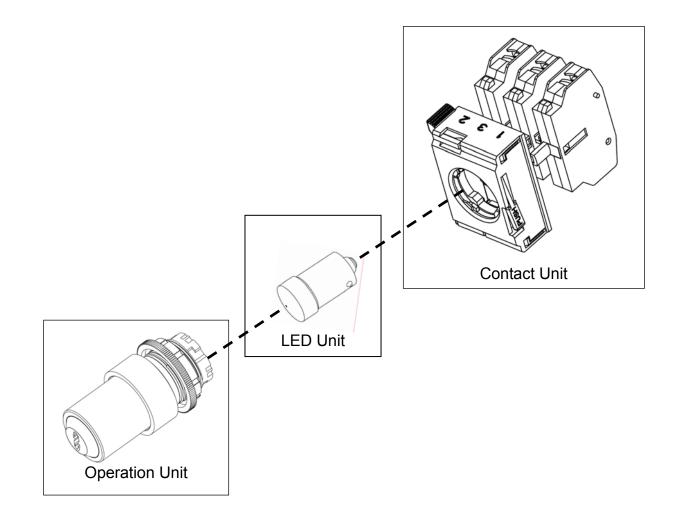

Operation unit, LED unit, and contact unit (contact blocks) can be sold separately. Please see [4.Part numbering system] for operation unit part number. For other accessories (LED lamp, contact block, etc.), please refer to accessory part in catalog.

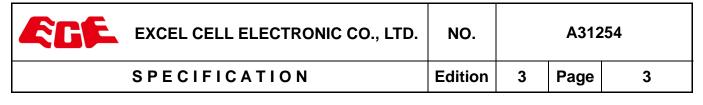



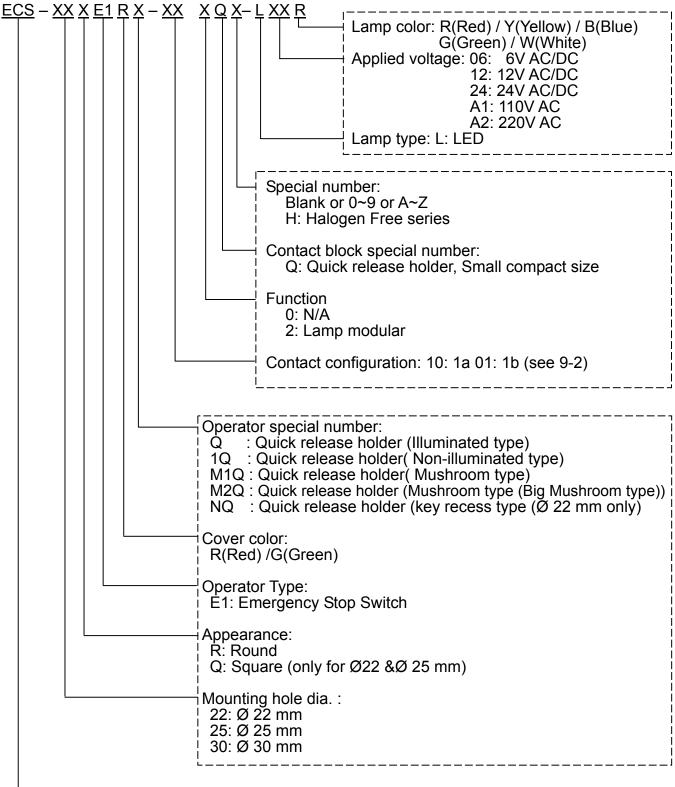

Series: ECS: Industrial Control Switch


| EXCEL CELL ELECTRONIC CO., LTD. | NO. | | A312 | 254 |
|---------------------------------|---------|---|------|-----|
| SPECIFICATION | Edition | 3 | Page | 4 |

- 5. INSTALLATION
 - 5-1. Panel thickness
 - ■The panel thickness must be 1 to 6 mm.
 - ■Take into consideration about the thickness of accessories

(such as name plate, switch guard, etc.) while using.

- 5-2. Panel cutout
 - Cutout diameter and distance


| | | | Unit: mm |
|---|----------------------------------|----------------------------------|-----------------------------|
| | 22R / 25R | 22Q / 25Q | 30R |
| А | 22.3/25.3 ^{+0.4} - 0 | 22.3/25.3 ^{+0.4} - 0 | 30.5 ^{+0.5} - 0 |



Unit: mm


| | 22R / 25R | 22Q / 25Q | 30R | Long Lever Selector Switch Emergency Stop Switch |
|---|-----------|-----------|-----|---|
| Х | 50 | 50 | 50 | 50 |
| Y | 55 | 55 | 65 | 55 |

■ Key recess cutout (Ø22mm only)




| | | Unit: mm |
|------------------|-----------------------------|----------------------------|
| Mounting Hole(Ø) | а | b |
| 22 | 24.1 ^{+0.5} - 0 | 3.2 ^{+0.2} - 0 |

Panel installation

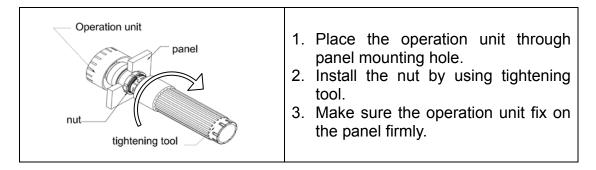


5-3. Operation unit and contact unit installation

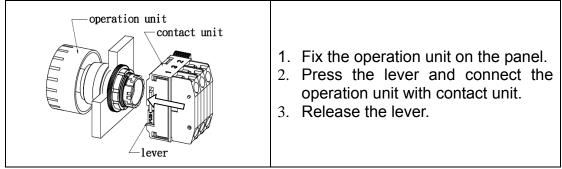

| EXCEL CELL ELECTRONIC CO., LTD. | | | A31254 | |
|---------------------------------|---------|---|--------|---|
| SPECIFICATION | Edition | 3 | Page | 5 |

5-4. LED lamp installation

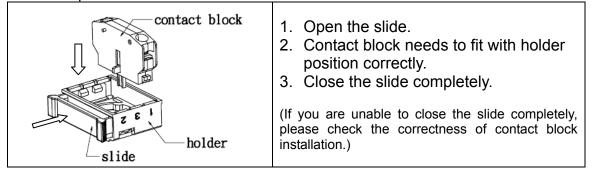

6. PACKAGING

- 6-1. ECS product is packed without assembly (packed by set), 10 sets per box.
- 6-2. Label information
 - (1) part number
 - (2) Lot number
 - (3) Quantity
 - (4) Tester number
 - (5) Date code

- (6) QC inspection stamp
- (7) Company mark
- (8) Company name
- (9) Notice

7. DIMENSIONS

- 7-1. See attached drawings
- 8. OPTIONS
 - 8-1. Key recess type operation unit is available (Ø 22mm only)
 - 8-2. Ø22mm and Ø25mm type have the same structure. Different thickness of O-rings can be ordered separately to fit into Ø22mm and Ø25mm hole in the panel.
 - 8-3. LED Specification

| LED Type | BA9S-T8 |
|-----------------------|---------------------|
| Durability(reference) | Approx. 50,000 Hrs. |
| Voltage | Printed on the LED |

- 8-4. For other accessories (name plate, control box, and etc.), please refer to accessory part in the catalog.
- 9. REMARK
 - 9-1. Safety Certification

| Safery Standard | Certification | | |
|-------------------------------------|-----------------------------|--|--|
| UL-508 | UL / cUL , file NO. E155181 | | |
| CSA C22.2 NO.14 | | | |
| EN60947-5-1 | R50363071 | | |
| EN60947-5-5 (Emergency Stop Switch) | R50362996 | | |
| CCC GB14048.5 | CQC2018010305138937 | | |

| EXCEL CELL ELECTRONIC CO., LTD. | | | A312 | 254 |
|---------------------------------|---------|---|------|-----|
| SPECIFICATION | Edition | 3 | Page | 6 |

9-2. Contact Configuration

| | <u> </u> | | | |
|------|----------|---------|------------------------|---------------------|
| Code | Contac | t block | without function block | with function block |
| Code | NO | NC | • | • |
| 10 | 1 | 0 | • | • |
| 01 | 0 | 1 | • | • |
| 11 | 1 | 1 | • | • |
| 20 | 2 | 0 | • | • |
| 02 | 0 | 2 | • | • |
| 12 | 1 | 2 | • | |
| 21 | 2 | 1 | • | |
| 30 | 3 | 0 | • | |
| 03 | 0 | 3 | • | 1/ |
| | | | | |

Remark:

• The colors of contact block are the followings: 1 NO:blue, 1 NC: red

• Maximum 3 contact blocks for every contact unit.

9-3. CAUTION

- To prevent injury, this device must be disconnected from all power sources prior to wiring and other initiating work.
- Use tightening tool when installing the operation unit in the panel cutout. Do not use pliers and do not tighten excessively, otherwise the operation unit may be damaged.
- Make sure contact blocks are firmly fixed on contact holder during assembly. It will avoid contact blocks separated from holder during operation.

