

+
2.5mm Contact Spacing, Battery Connectors
EIO-CL26 **H TYPE SERIES**

■ FEATURES

- 2.5mm contact spacing.
- No. of contacts: 4~6pin.
- Available in embossed type for automatic mounting.

■ SPECIFICATIONS

1.ELECTRICAL

- Voltage rating: 200V
- Current rating: 1.5A
- Contact resistance: 25mΩ max.
- Insulation resistance: 10MΩ min.

2.MECHANICAL

- Durability: Mate & Unmate with applicability for 10000 times, Contact resistance: 25mΩ max.
- Normal Force: Measure normal force at contact point deflection 1.05mm, Requirements: 112.2gf min., 153gf max.
- Retention Force: 200gf min.

■ MATERIALS

1.MATERIAL

- Contacts: Copper Alloy
- Insulator Housing: High Temp. Thermoplastic

2.PLATING

Contact:

- Nickel In All Area
- Au over Nickel (RoHS Compliant)

■ PACKING

1.Packing method

- All connectors are packed in reel method.


EIO-CL26-S004H6



EIO-CL26-S004H3



■ PART NUMBERING SYSTEM

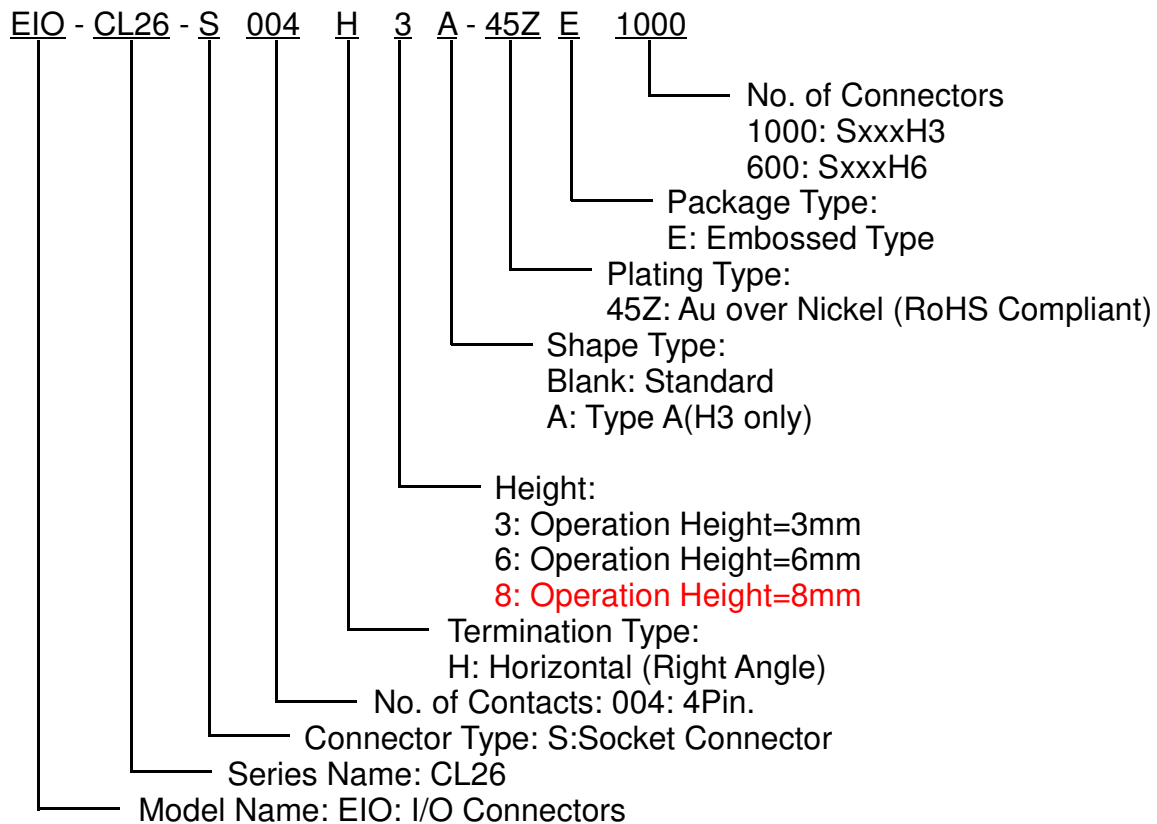

■ DIMENSIONS UNIT:mm

