




# NEOCENE

# 2H35A | SPECIFICATION

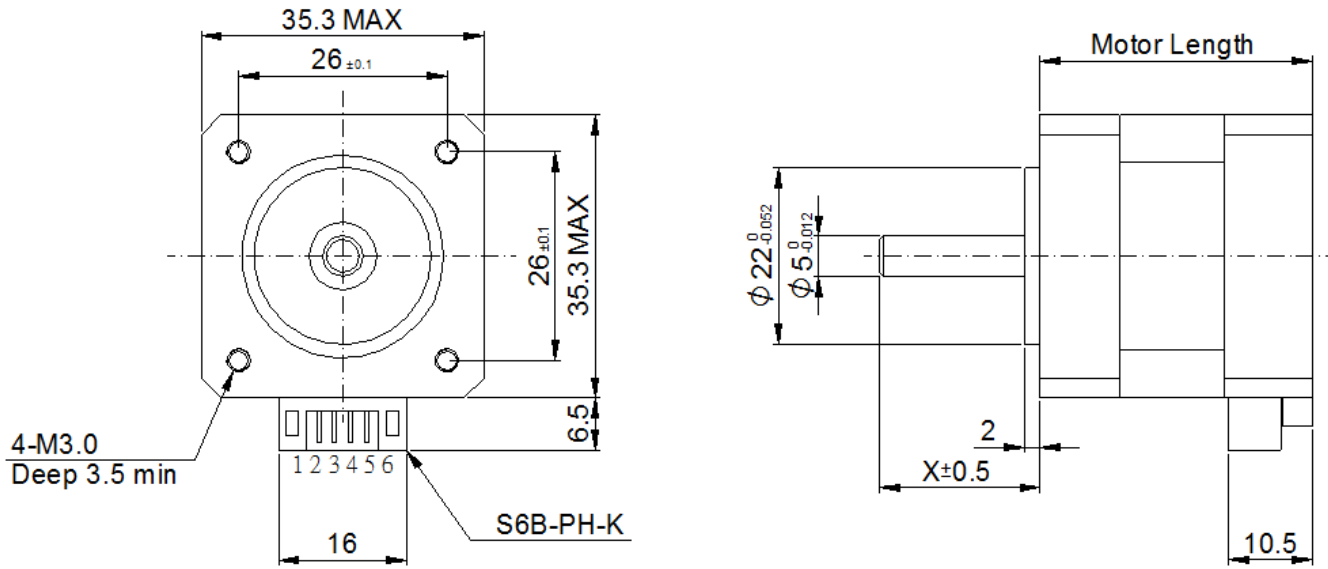

Model	2H35A(Bipolar)						
	Step Angle	Rated Voltage	Holding Torque	Rated Current	Winding Resistance	Inductance	Motor Length
	Deg	V	mN · m	A	Ω	mH	mm
2H35A6	1.8	2~36	100	0.4	20	20	26
			100	0.75	4.3	4.0	
2H35A7	1.8	2~36	150	0.4	24	38	34
			150	0.75	5.8	9.5	
2H35A8	1.8	2~36	200	0.5	18	25.5	40
			200	1.2	2.5	3.8	
2H35AA	1.8	2~36	300	0.5	24	42	50

Model	2H35A(Unipolar)						
	Step Angle	Rated Voltage	Holding Torque	Rated Current	Winding Resistance	Inductance	Motor Length
	Deg	V	mN · m	A	Ω	mH	mm
2H35A6	1.8	2~36	70	0.35	30	14.5	26
			70	0.5	10	5.5	