

## SCREWLESS TYPE TERMINAL BLOCK

E133988(R)

ETB69 SERIES

SCREWLESS TYPE

PITCH=9.0mm

### FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

### SPECIFICATIONS

- Pitch 9.0mm
- Wire range  $\varnothing 1.2 \sim \varnothing 2.0$ mm (Solid)
- No. of pole per block 2P
- Rating 20 Amp, 300 VAC
- Housing PBT, Gray
- Terminals Tin plated over Brass
- Springs Stainless Steel
- Push button PBT, Black
- Operating temperature  $-30^{\circ}\text{C} \sim +110^{\circ}\text{C}$   
(includes temperature rise limit)
- Stripping length 14mm
- UL Approval 300V, 20A,  $\varnothing 1.2 \sim \varnothing 2.0$ mm (Solid)



### PART NUMBERING SYSTEM

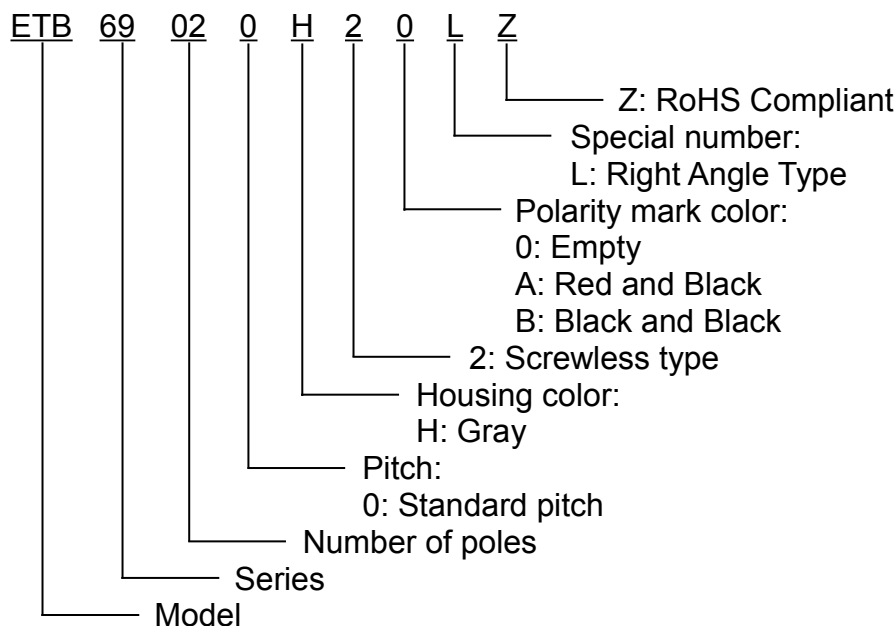

## ■ DRAWING

