



Contact Spacing 2.0mm, Board To Board Connectors EBB14 SERIES (Female Header)

■ FEATURES

- Available in Straight, Right angle
- Contact spacing: 2.0mm
- No. of contacts: 02~50 pin. / per row
- Packaging: Bag

■ SPECIFICATIONS

1.ELECTRICAL

- Current rating: 1.0~3.0A (see drawing)
- Contact resistance: 20mΩ max.
- Insulation resistance: 1000MΩ min.
- Operating Temperature: -40 to +105°C

■ MATERIALS

1.MATERIAL

- Contacts: Brass
- Insulator Housing:
High Temp Thermoplastic

2.PLATING

Contact:

- Nickel In All Area
- Gold over Nickel. (RoHS Compliant)

■ PACKING


1.Packing method

1-1.Packaging: Bag

2.Information on label (stuck to each ploy bag, reel and box)


(1)Part NO. (2)Section. (3)Lot NO. (4)Quantity.
(5)QC stamp. (6)Reprocess NO. (7)ECE mark.

■ PART NUMBERING SYSTEM

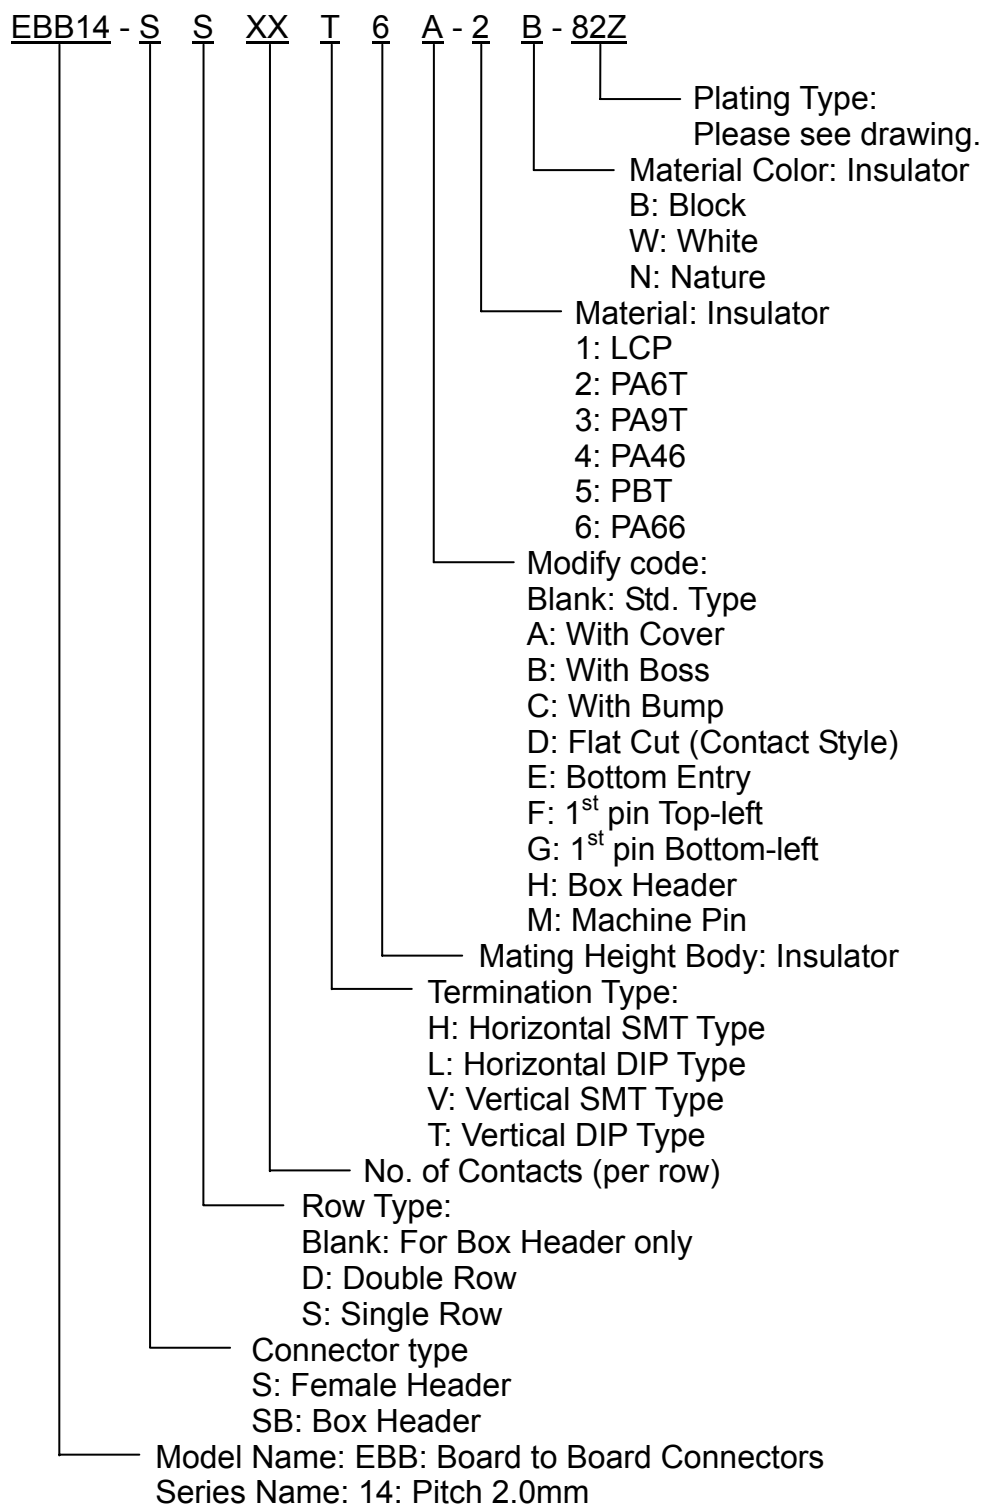


■ DIMENSIONS UNIT:mm




DIMENSIONS UNIT:mm
 EBB14-SBxxT_Box Header Series

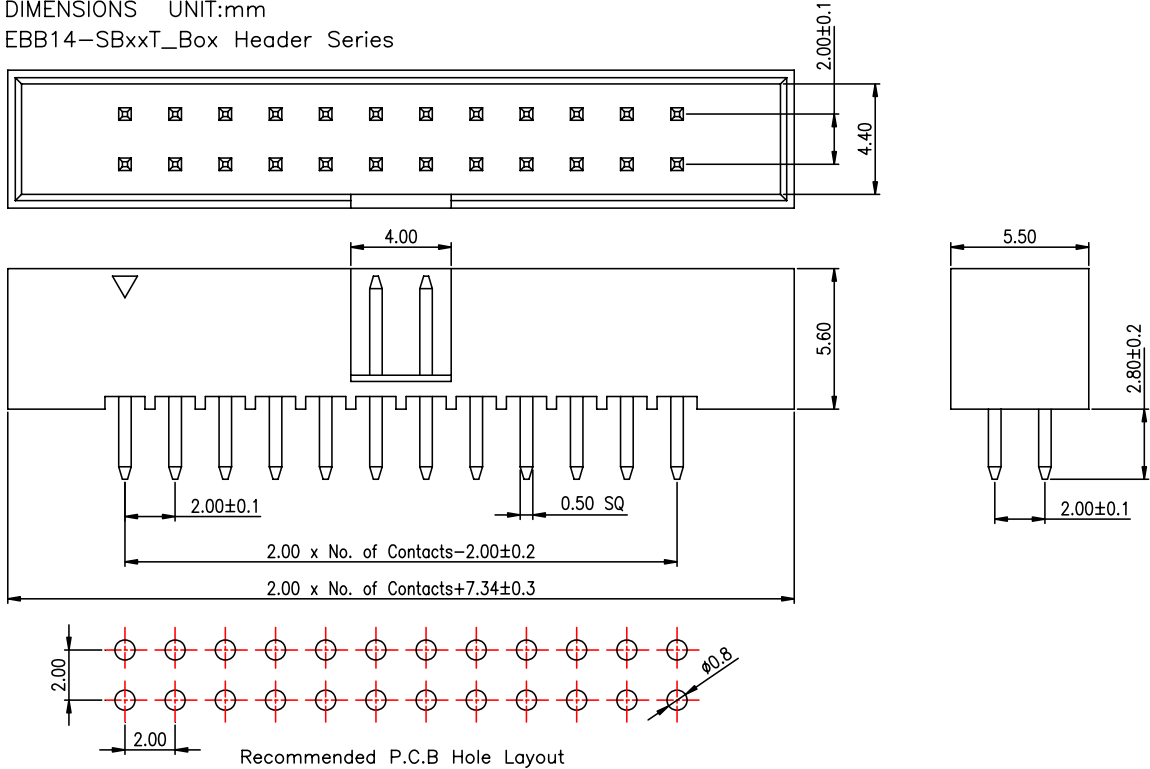


DIMENSIONS UNIT:mm
 EBB14-SSxxT

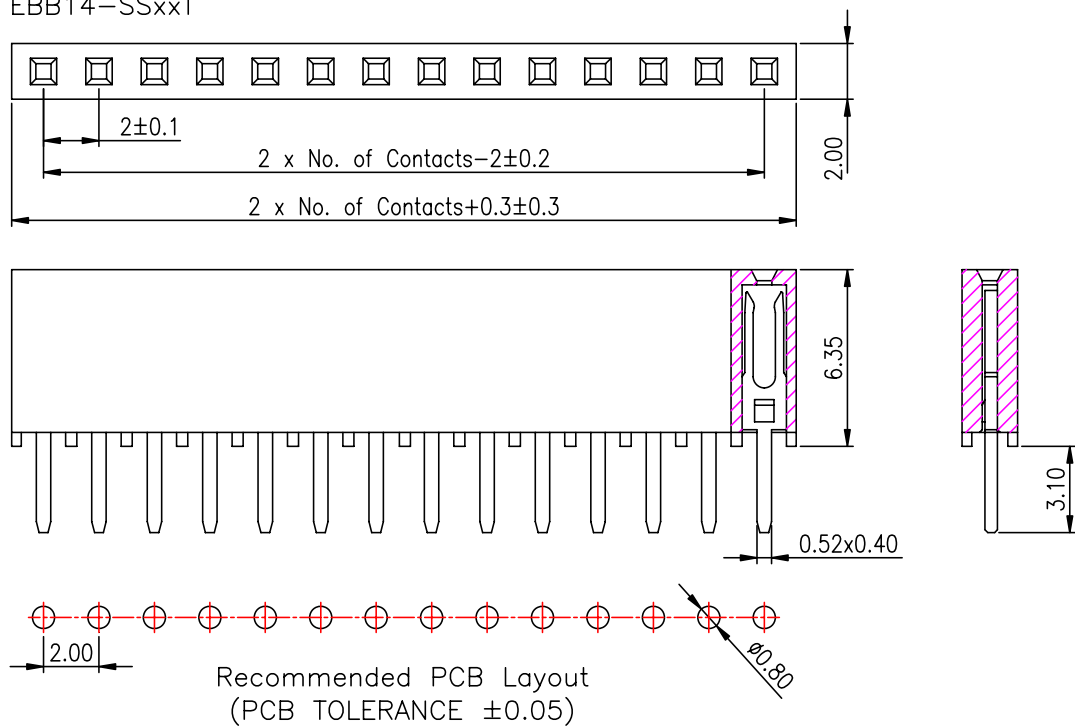

DIMENSIONS UNIT:mm
EBB14-SDxxL

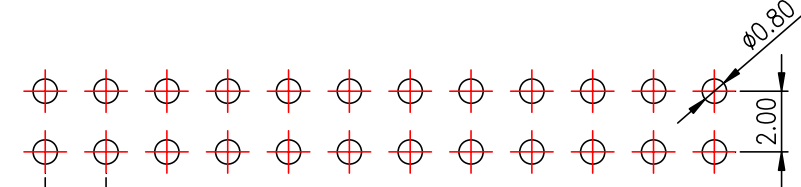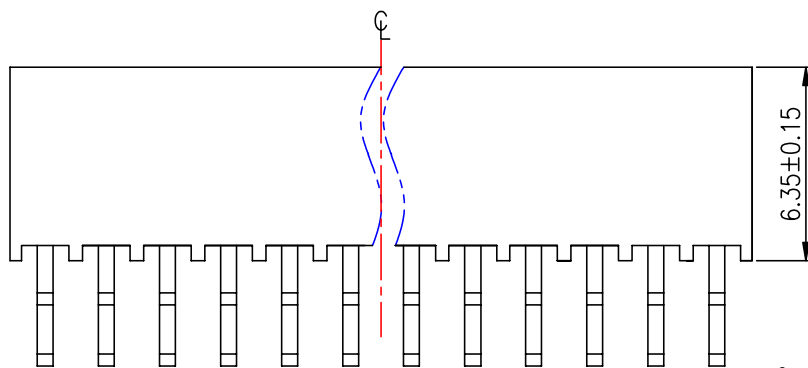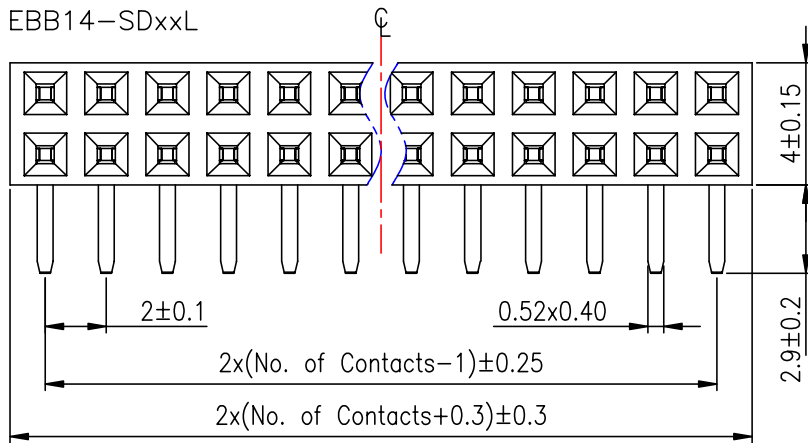

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)



DIMENSIONS UNIT:mm
EBB14-SDxxV

