



# Terminal Block

## SCREWLESS TYPE TERMINAL BLOCK

UL E133988(R)

ETB63 SERIES

SCREWLESS TYPE

PITCH=2.54mm

### FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

### SPECIFICATIONS


- Pitch 2.54mm
- Wire range 28~22 AWG (0.34mm<sup>2</sup>)
- No. of pole per block 2P to 20P
- Rating 3 Amp, 150 VAC
- Housing PA66
- Terminals Tin plated over Brass
- Springs Stainless Steel
- Push button PA66
- Operating temperature -30°C ~ +110°C  
(includes temperature rise limit)
- Stripping length 9mm
- UL Approval 150V, 3A, 28~22 AWG



### PART NUMBERING SYSTEM

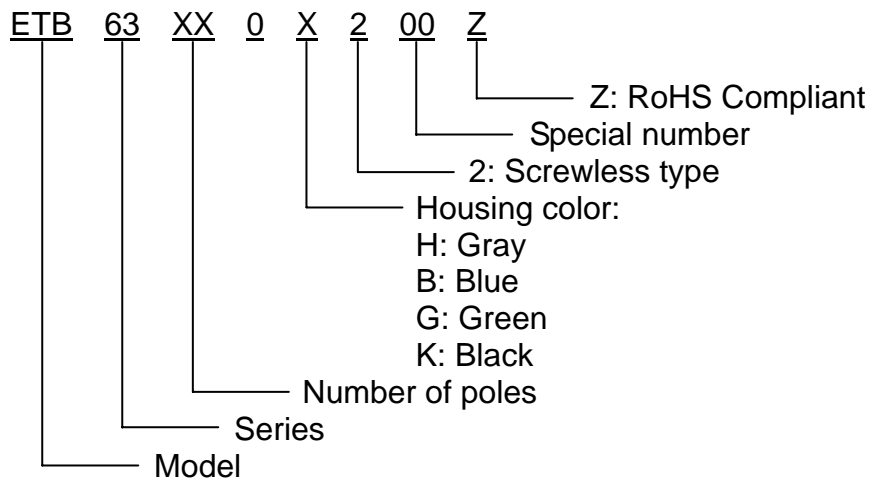

## ■ DRAWING

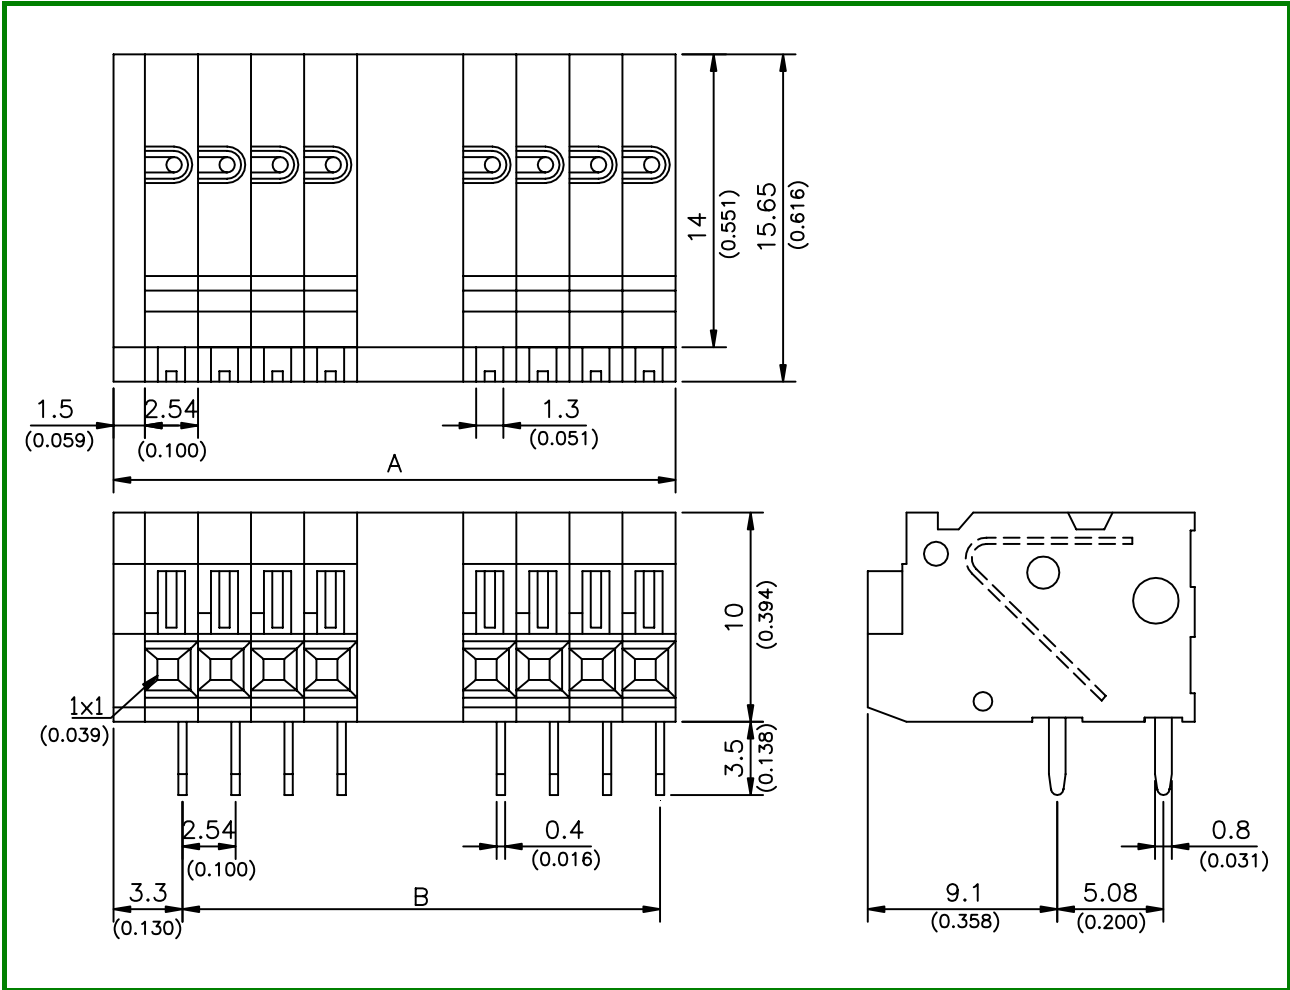

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13
A	6.58 (0.259)	9.12 (0.359)	11.66 (0.459)	14.20 (0.559)	16.74 (0.659)	19.28 (0.759)	21.82 (0.859)	24.36 (0.959)	26.90 (1.059)	29.44 (1.159)	31.98 (1.259)	34.52 (1.359)
B	2.54 (0.100)	5.08 (0.200)	7.62 (0.300)	10.16 (0.400)	12.70 (0.500)	15.24 (0.600)	17.78 (0.700)	20.32 (0.800)	22.86 (0.900)	25.40 (1.000)	27.94 (1.100)	30.48 (1.200)
POLE DIM.	14	15	16	17	18	19	20					
A	37.06 (1.459)	39.60 (1.559)	42.14 (1.659)	44.68 (1.759)	47.22 (1.859)	49.76 (1.959)	52.30 (2.059)					
B	33.02 (1.300)	35.56 (1.400)	38.10 (1.500)	40.64 (1.600)	43.18 (1.700)	45.72 (1.800)	48.26 (1.900)					