



**Rely on ECE's Relays,
and You Always Relax!**

GENERAL CONTROL RELAY ETR MIT SERIES

■ FEATURES

- Slim type with 10A rated load.
- Insulation distance of 8mm is designed.
- Surge Resistance up to 10,000V.
- High Sensitivity DC Coil Type of low power consumption available.
- TV-5 at 120VAC is certified by UL.
- Comply with RoHS and REACH regulations.


■ SPECIFICATIONS

Contact Resistance	Max. 100mΩ at initial value. @1A,6VDC
Contact Capacity	10 Amps at 240VAC Cosφ=1 5 Amps at 24VDC L/R=0
Operate Time	15m Sec. Max. (D Type) 20m Sec. Max. (L Type)
Release Time	8m Sec. Max.
Dielectric Strength	Between coil & Contact: 5000VAC at 50/60Hz for one minute Between Contacts: 1000VAC at 50/60Hz for one minute
Insulation Resistance	100MΩ Min. at 500VDC

■ COIL SPECIFICATION AT 20°C

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω±10%)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max. Allowable Voltage (VDC)
MIT-DM	3	240	12.5	Abt. 0.72	80% Max.	5% Min.	130%
	5	138.9	36				
	6	120	50				
	9	78.3	115				
	12	60	200				
	24	29.3	820				
MIT-LM	3	176.5	17	Abt. 0.54	80% Max.	5% Min.	130%
	5	106.4	47				
	6	88	68				
	9	58	155				
	12	44.4	270				
	24	21.8	1,100				
	48	11	4,400				

■ PART NUMBER SYSTEM

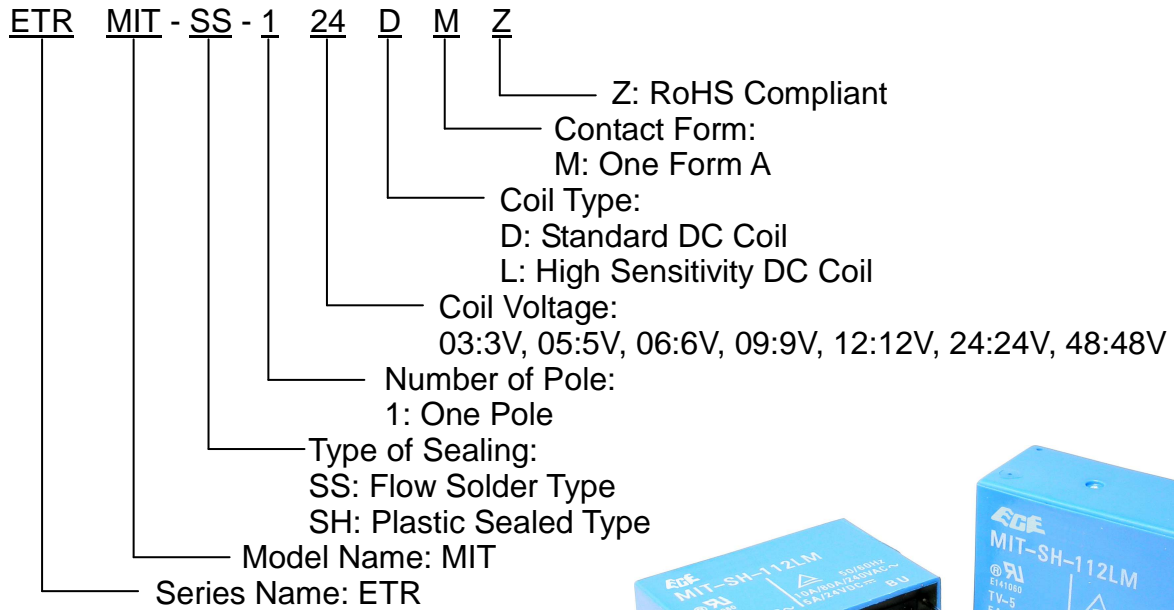

*Marking without: "ETR" & "Z".



■ DIMENSIONS ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

