


**EAD SERIES
AUTO INSERTING SMT TYPE**

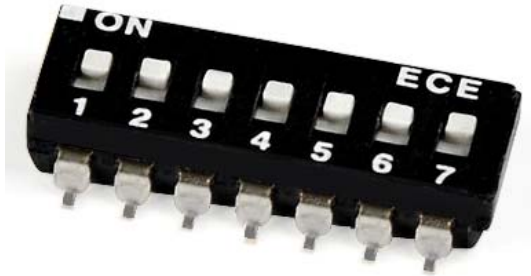

■ FEATURES

- Same size with IC, can be assembled by any automatic IC inserter.
- Molded 0.3" integrated circuit packing outline allowing automatic insertion.
- Smaller size makes better heat convection during PC board reflow wave soldering.
- Top tape sealed to withstand wave soldering, board washing.
- All plastics are UL 94V-0 grade fire retardant.
- Gold plated contact to ensure low contact resistance and Tin plated terminals to prevent contamination during soldering.
- RoHS Compliant

■ APPLICATIONS

- Numerical setting for computer terminal equipment
- Price setting for vending machines
- Programming for game machines
- Programming for industrial equipment and measuring instruments

■ SPECIFICATIONS

1.ELECTRICAL


● Contact rating	switching	25mA, 24VDC
	non-switching	100mA
● Contact resistance	initial	50mΩ Max.
	after life test	100mΩ Max.
● Insulation resistance	1000mΩ Min. at 100VDC	
● Dielectric strength	500VDC Min. for 60 seconds	
● Capacitance between adjacent switches 5pF Max.		




2.MECHANICAL and ENVIRONMENTAL

● Temperature rating	operating	-40°C to +85°C
	storage	-40°C to +85°C
● Operation force	800g Max.	
● Mechanical life	2000 operations	
● Humidity	95% RH, 40°C for 96 Hrs.	
● Vibration	10Hz-55Hz-10Hz for 6 Hrs.	
● Resistance to soldering heat	Solder reflow : peak temperature 260°C Max.	
● Reflow soldering process for SMT type	Reference ICE 61760	

■ PART NUMBERING SYSTEM

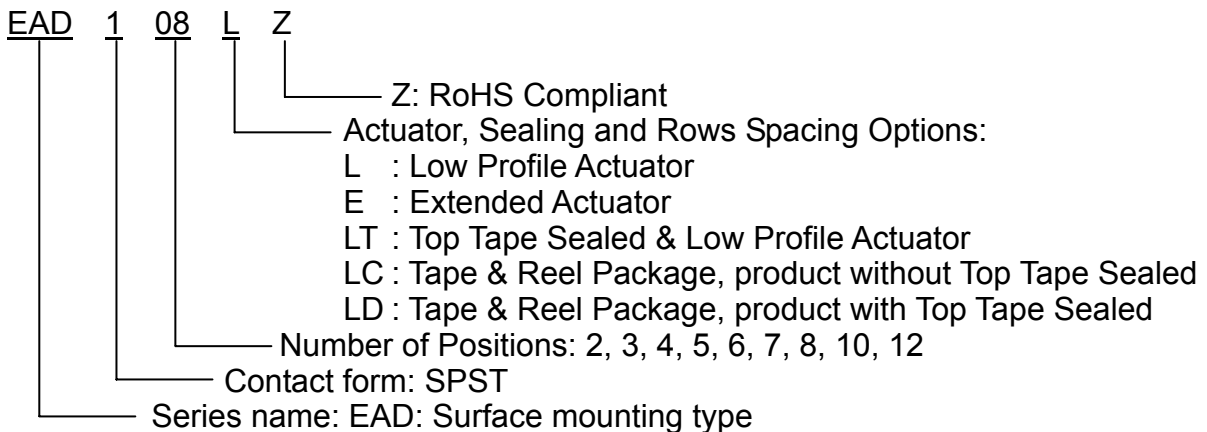


CONSTRUCTION

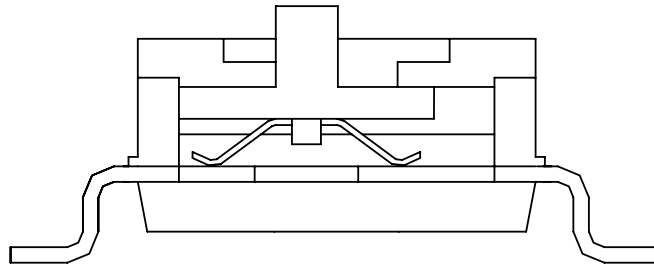

OPTIONS


- 1.Special marking is available
- 2.Extended Actuator

- 3.Top Tape Sealed




PACKAGING


- 1.Tape & Reel Packaging (per EIA STANDARD)

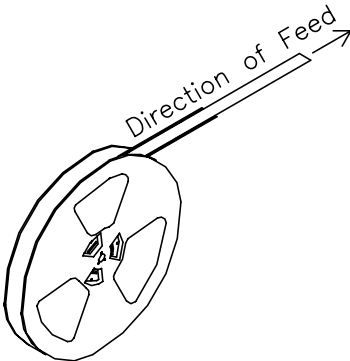


For 2P Direction of feed

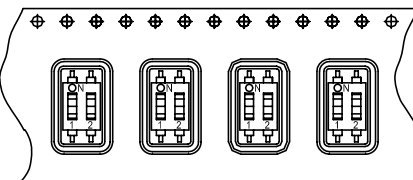

For 3P-6P Direction of feed

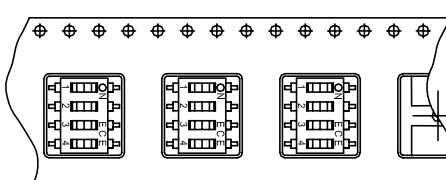

For 7P-12P Direction of feed

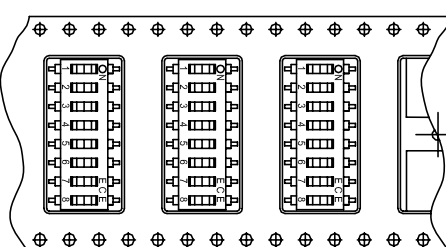

TYPE	No. of pcs per reel
2P	1300
3P	1000
4P	1000
5P	1000
6P	1000
7P	1000
8P	1000
9P	1000
10P	1000
12P	1000

DIMENSIONS AND CIRCUITRY




EAD SERIES

Dimension A


Unit: mm(inch)

CIRCUIT DIAGRAM


Positions	2	3	4	5	6	7	8	10	12
A	6.88 (0.271)	9.42 (0.371)	11.96 (0.471)	14.50 (0.571)	17.04 (0.671)	19.58 (0.771)	22.12 (0.871)	27.20 (1.071)	32.28 (1.271)

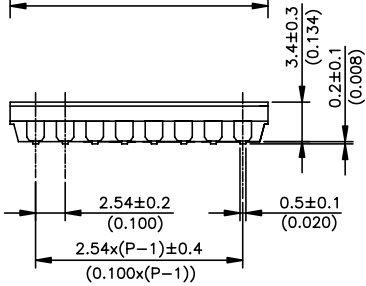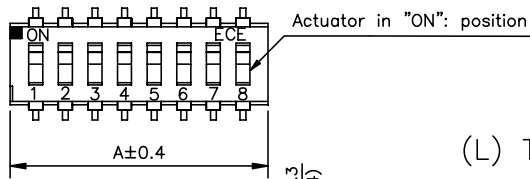

(L) TYPE



(E) TYPE



P.C.B. LAYOUT
(TOP VIEW)

