

## SCREWLESS TYPE TERMINAL BLOCK

 E133988(R)

ETB63 SERIES

SCREWLESS TYPE


PITCH=2.54mm

### ■ FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire
- RoHS Compliant
- Halogen free series available

### ■ SPECIFICATIONS


- Pitch 2.54mm
- Wire range 28~22 AWG (0.34mm<sup>2</sup>)
- No. of pole per block 2P to 20P
- Rating 3 Amp, 150 VAC
- Housing PA66
- Terminals Tin plated over Brass
- Springs Stainless Steel
- Push button PA66
- Operating temperature -30°C~+110°C  
(includes temperature rise limit)
- Stripping length 9mm
- UL Approval 150V, 3A, 28~22 AWG

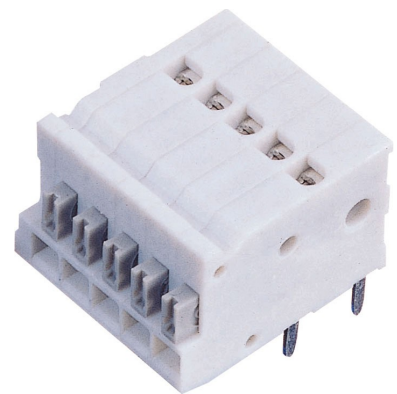

### ■ PART NUMBERING SYSTEM

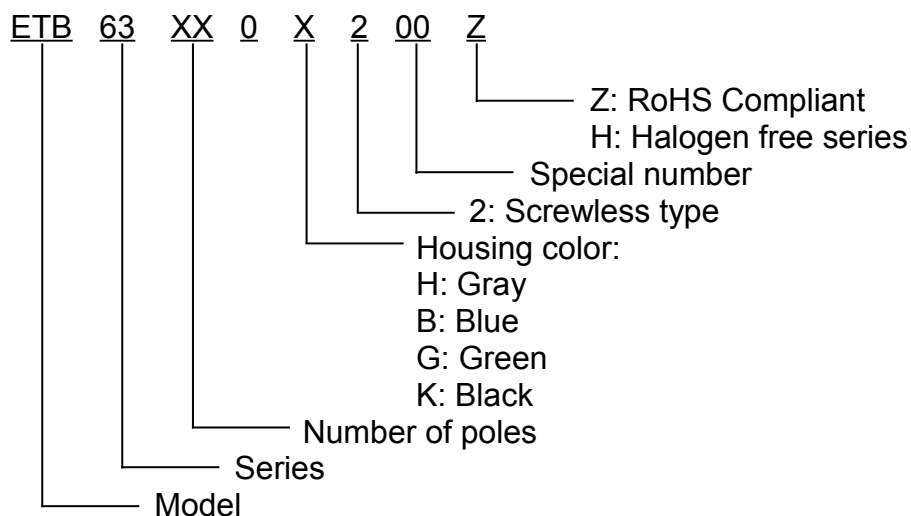

## DRAWING

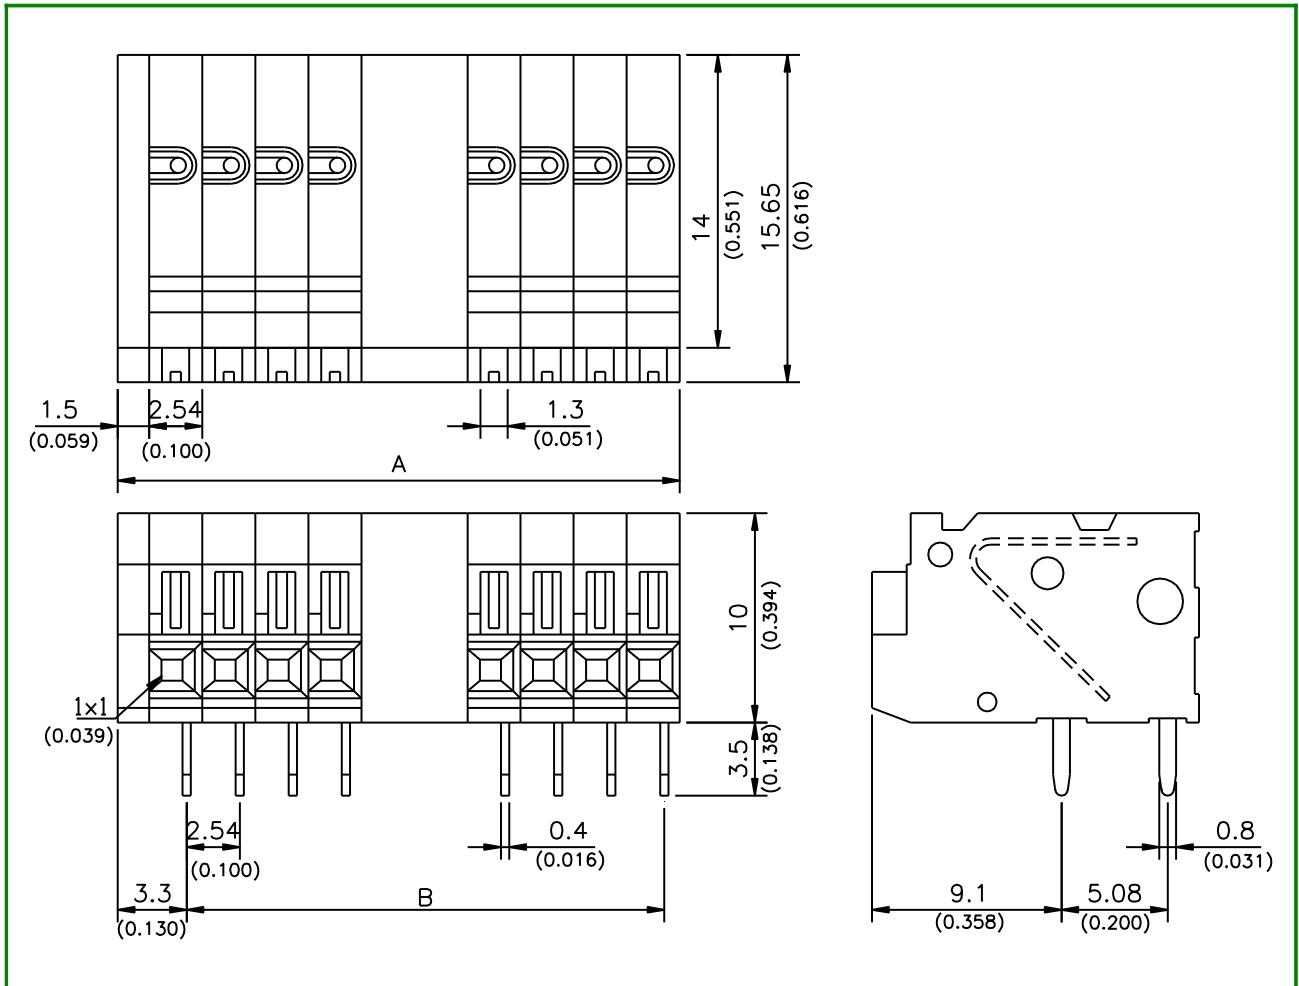

| POLE DIM. | 2                | 3                | 4                | 5                | 6                | 7                | 8                | 9                | 10               | 11               | 12               | 13               |
|-----------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| A         | 6.58<br>(0.259)  | 9.12<br>(0.359)  | 11.66<br>(0.459) | 14.20<br>(0.559) | 16.74<br>(0.659) | 19.28<br>(0.759) | 21.82<br>(0.859) | 24.36<br>(0.959) | 26.90<br>(1.059) | 29.44<br>(1.159) | 31.98<br>(1.259) | 34.52<br>(1.359) |
| B         | 2.54<br>(0.100)  | 5.08<br>(0.200)  | 7.62<br>(0.300)  | 10.16<br>(0.400) | 12.70<br>(0.500) | 15.24<br>(0.600) | 17.78<br>(0.700) | 20.32<br>(0.800) | 22.86<br>(0.900) | 25.40<br>(1.000) | 27.94<br>(1.100) | 30.48<br>(1.200) |
| POLE DIM. | 14               | 15               | 16               | 17               | 18               | 19               | 20               |                  |                  |                  |                  |                  |
| A         | 37.06<br>(1.459) | 39.60<br>(1.559) | 42.14<br>(1.659) | 44.68<br>(1.759) | 47.22<br>(1.859) | 49.76<br>(1.959) | 52.30<br>(2.059) |                  |                  |                  |                  |                  |
| B         | 33.02<br>(1.300) | 35.56<br>(1.400) | 38.10<br>(1.500) | 40.64<br>(1.600) | 43.18<br>(1.700) | 45.72<br>(1.800) | 48.26<br>(1.900) |                  |                  |                  |                  |                  |