

SCREWLESS TYPE TERMINAL BLOCK

 E133988(R)

ETB69 SERIES

SCREWLESS TYPE


PITCH=10.0mm

FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire
- RoHS Compliant
- Halogen free series available

SPECIFICATIONS

- Pitch 10.0mm
- Wire range $\varnothing 1.2 \sim \varnothing 2.0\text{mm}$ (Solid)
- No. of pole per block 3P
- Rating 20 Amp, 300 VAC
- Housing PBT, Gray
- Terminals Tin plated over Brass
- Springs Stainless Steel
- Push button PBT, Black
- Operating temperature $-30^{\circ}\text{C} \sim +110^{\circ}\text{C}$
(includes temperature rise limit)
- Stripping length 14mm
- UL Approval 300V, 20A, $\varnothing 1.2 \sim \varnothing 2.0\text{mm}$ (Solid)

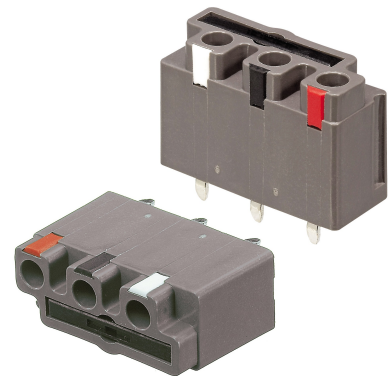

PART NUMBERING SYSTEM

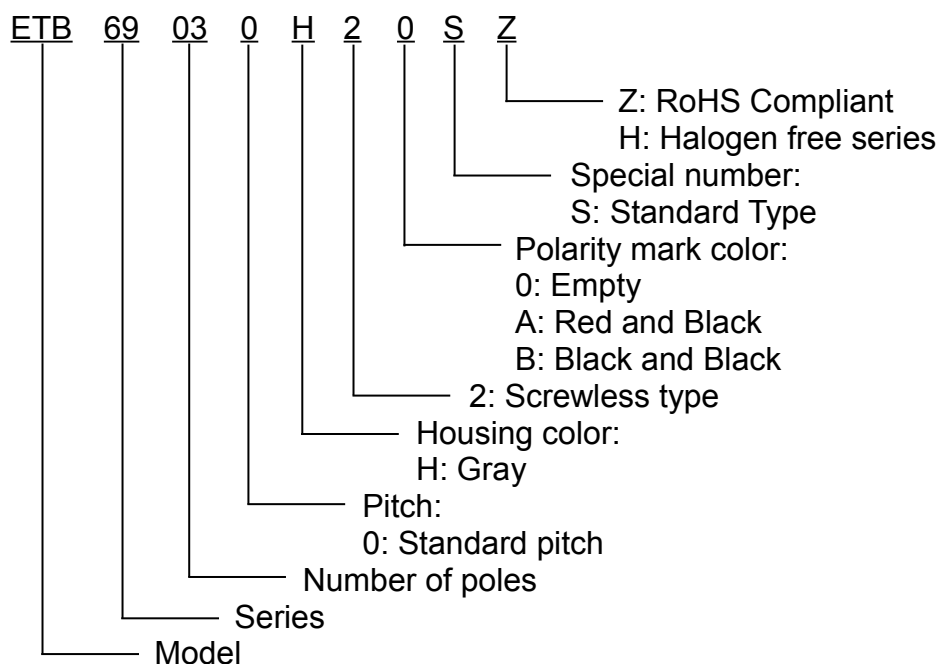

■ DRAWING

