

SCREWLESS TYPE TERMINAL BLOCK

ENEC-01220
E133988(R)

ETB6F SERIES

SCREWLESS TYPE


PITCH=2.54mm

■ FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire
- RoHS Compliant
- Halogen free series available

■ SPECIFICATIONS


- | | |
|-------------------------|---|
| ● Pitch | 2.54mm |
| ● Wire range | 26~20 AWG (0.5mm ²) |
| ● No. of pole per block | 2P to 20P |
| ● Rating | 6 Amp, 150 VAC |
| ● Housing | PA66 |
| ● Terminals | Tin plated over Copper Alloy |
| ● Springs | Stainless Steel |
| ● Push button | PA66 |
| ● Operating temperature | -30°C~+110°C
(includes temperature rise limit) |
| ● Stripping length | 9mm |
| ● UL Approval | 150V, 6A, 26~20 AWG |

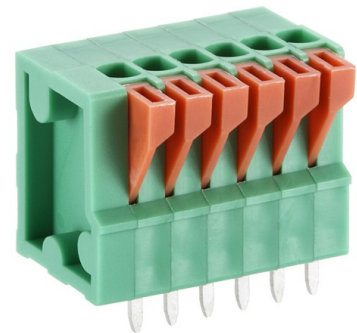

■ PART NUMBERING SYSTEM

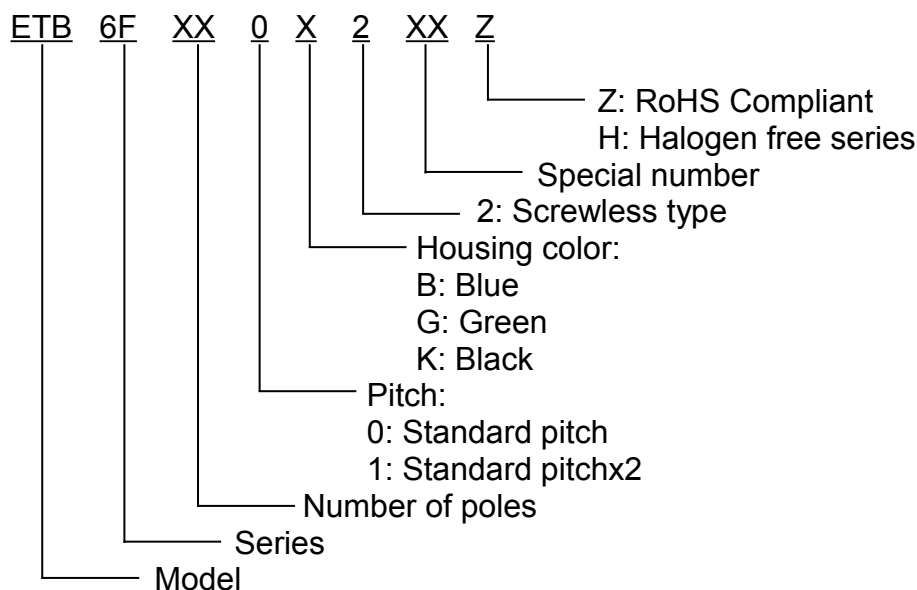

DRAWING

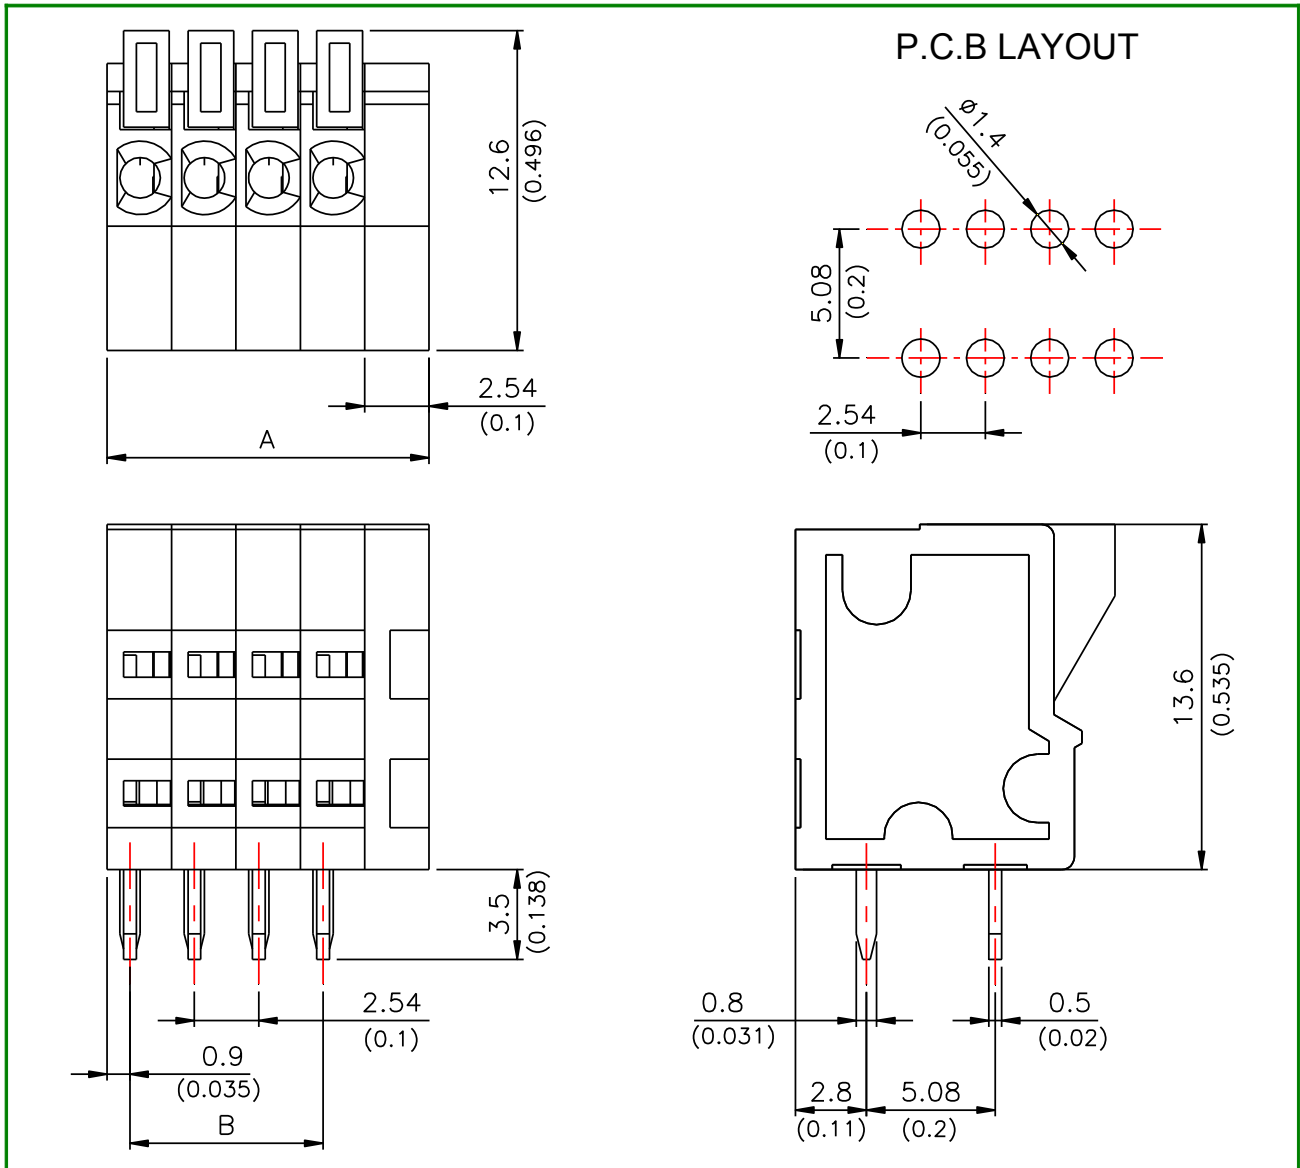

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13
A	7.62 (0.300)	10.16 (0.400)	12.70 (0.500)	15.24 (0.600)	17.78 (0.700)	20.32 (0.800)	22.86 (0.900)	25.40 (1.000)	27.94 (1.100)	30.48 (1.200)	33.02 (1.300)	35.56 (1.400)
B	2.54 (0.100)	5.08 (0.200)	7.62 (0.300)	10.16 (0.400)	12.70 (0.500)	15.24 (0.600)	17.78 (0.700)	20.32 (0.800)	22.86 (0.900)	25.40 (1.000)	27.94 (1.100)	30.48 (1.200)
POLE DIM.	14	15	16	17	18	19	20					
A	38.10 (1.500)	40.64 (1.600)	43.18 (1.700)	45.72 (1.800)	48.26 (1.900)	50.80 (2.000)	53.34 (2.100)					
B	33.02 (1.300)	35.56 (1.400)	38.10 (1.500)	40.64 (1.600)	43.18 (1.700)	45.72 (1.800)	48.26 (1.900)					