




SUMMARY

2T1515 is compactness and space-efficient
which can use in small mechanism
Halogen Free series available

USES

IP Camera/Video Camera/Surveillance
Camera/Label Printer/Scanner

➤ DIMENSIONS :

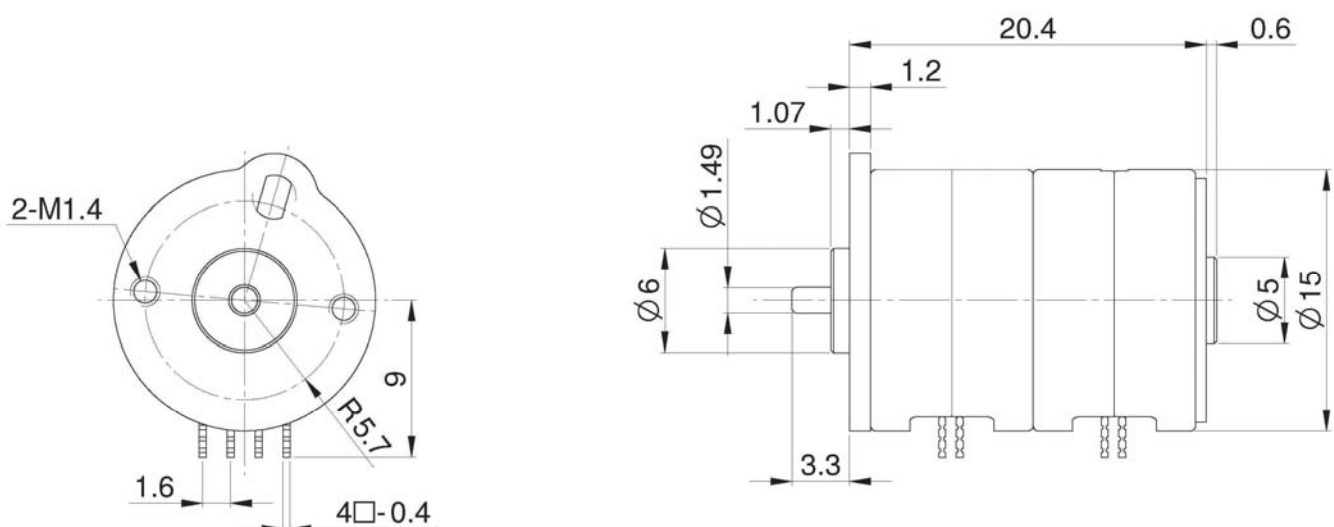



NEOCENE

2T1515 | SPECIFICATION

Item	2T1515
Standard voltage	12V
Standard Current	500 mA/Phase
Number of phase	4 Phase
Step angles	18° / Step
Excitation	2-2 Bipolar
Pull-out torque	30 g-cm or more / 3000 pps
Pull-in torque	45 g-cm or more / 1000 pps
Holding torque	90 g-cm or more
Resistance per phase	26 Ω
Max pull-out pulse rate	3000 pps or more
Max pull-in pulse rate	1200 pps or more

➤ CHARACTERISTICS :

12V

