





SUMMARY

Suitable for large printer.
Halogen Free series available

USES

Surveillance Camera / Label Printer

DIMENSIONS:

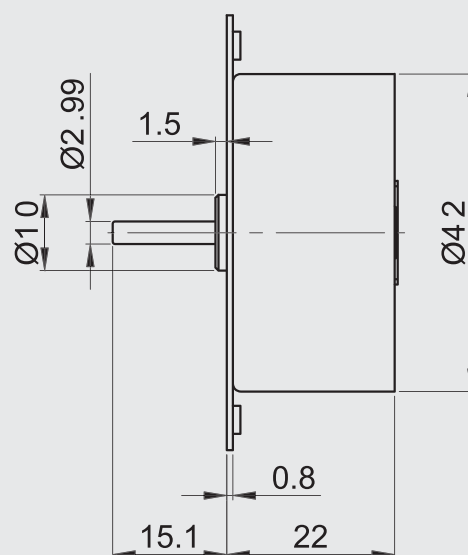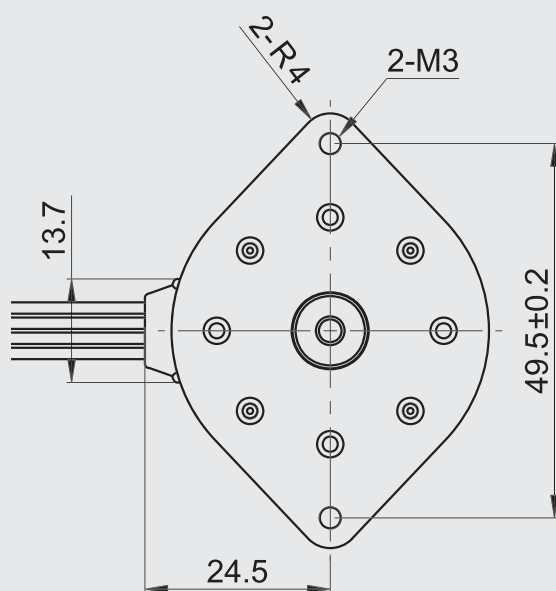


2T4235 | SPECIFICATION

Item	2T4235	
Standard voltage	24 V	24 V
Standard Current	500 mA / Phase	700 mA / Phase
Number of phase	4 phase	4 phase
Step angles	7.5° / Step	7.5° / Step
Excitation	2-2 Bipolar	1-2 Bipolar
pull-out torque	477 g-cm or more / 750 pps	368 g-cm or more / 2200 pps
pull-in torque	400 g-cm or more / 400 pps	872 g-cm or more / 400 pps
Holding torque	610 g-cm or more	1150 g-cm or more
Resistance per phase	2.1 Ω	7 Ω
Max pull-out pulse rate	2000 pps or more	2460 pps or more
Max pull-in pulse rate	500 pps or more	1650 pps or more

CHARACTERISTICS:

24 V

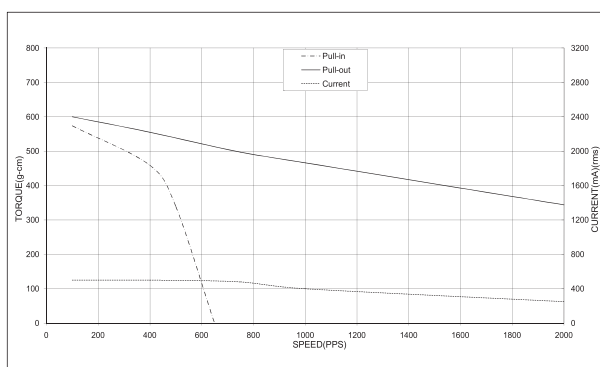

24 V

