


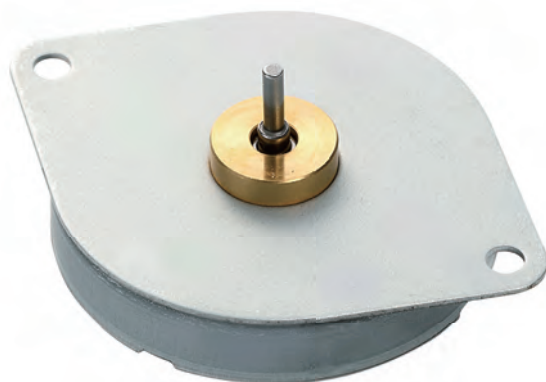

SUMMARY


Unique technology of Neocen which can replace HYBRID and fulfill high Torque requirements. and fulfill high Torque requirements.

Halogen Free series available

USES

Surveillance Camera / Scanner /
Medical Equipment


DIMENSIONS:

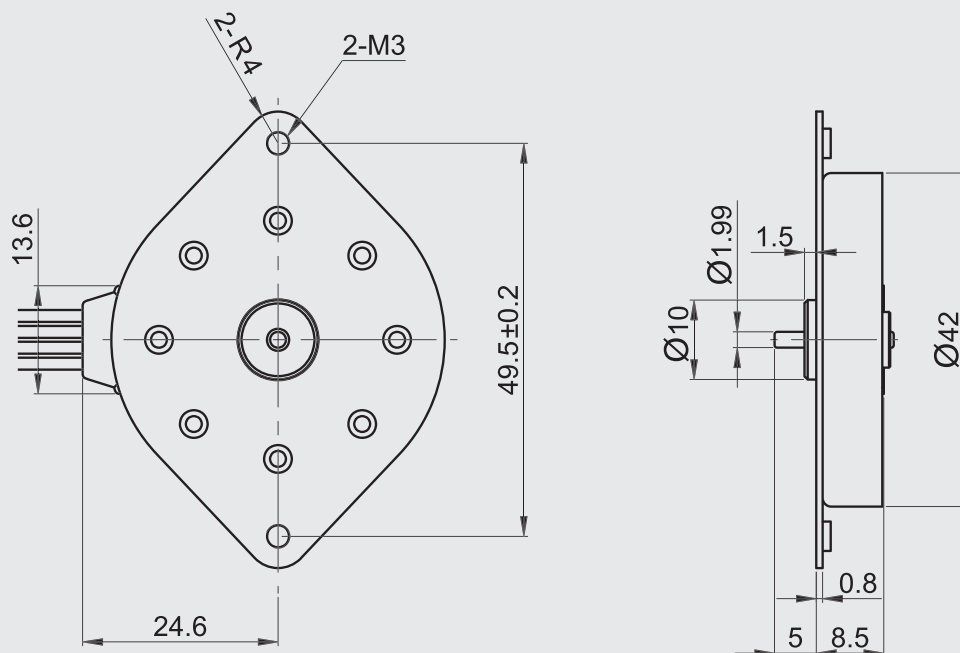

Item	2T42X2	
Standard voltage	13.5 V	24 V
Standard Current	400 mA / Phase	400 mA / Phase
Number of phase	4 phase	4 phase
Step angles	1.8° / Step	3.75° / Step
Excitation	2-2 Bipolar	1-2 Bipolar
pull-out torque	83 g-cm or more / 7000 pps	36 g-cm or more / 22000 pps
pull-in torque	83 g-cm or more / 400 pps	94 g-cm or more / 100 pps
Holding torque	220 g-cm or more	115 g-cm or more
Resistance per phase	5.8 Ω	4.0 Ω
Max pull-out pulse rate	8500 pps or more	30000 pps or more
Max pull-in pulse rate	935 pps or more	1620 pps or more

CHARACTERISTICS:

13.5 V

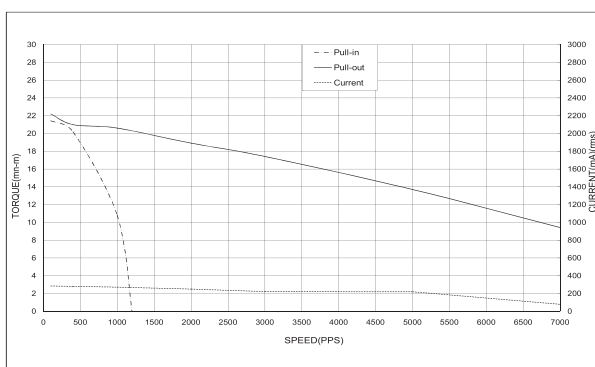

24 V

