




SUMMARY

Different types step angles ($15^\circ / 18^\circ$) for designer to choose and common in Air Conditioning Damper Actuator. Halogen Free series available

USES

Video Camera/ Surveillance Camera / Scanner / Label Printer/ Gear Box


DIMENSIONS:

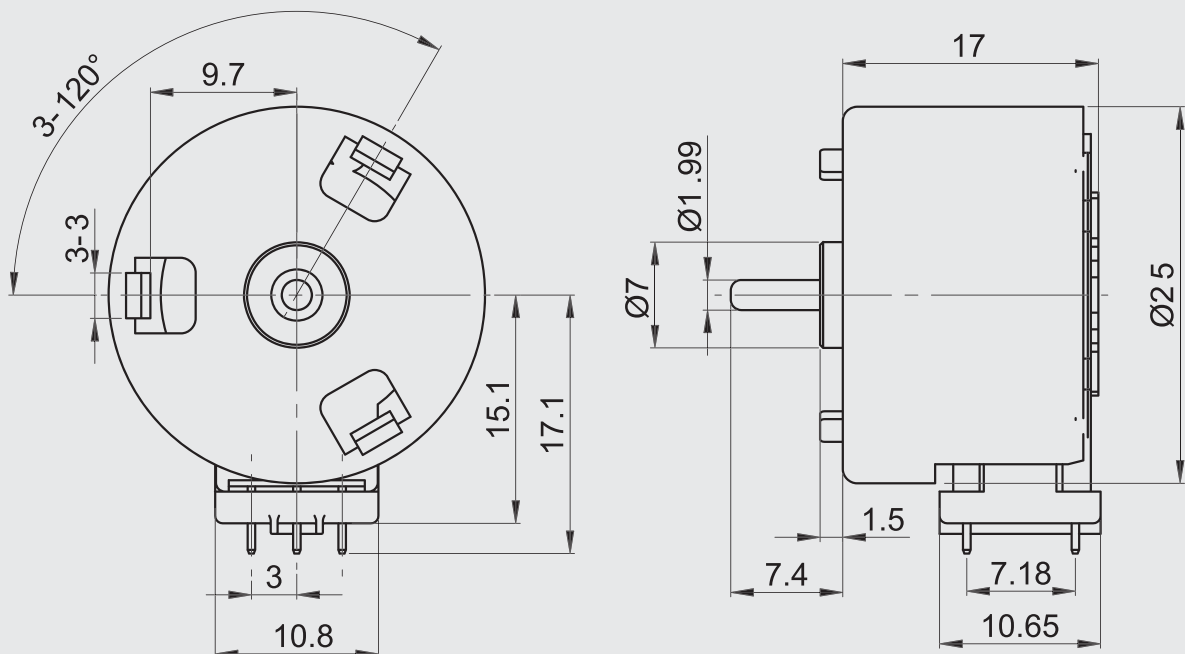

Item	2T25X4	
Standard voltage	5.2 V	24 V
Standard Current	343 mA / Phase	340 mA / Phase
Number of phase	4 phase	4 phase
Step angles	18° / Step	15° / Step
Excitation	2-2 Bipolar	2-2 Bipolar
pull-out torque	30 g-cm or more / 600 pps	75 g-cm or more / 2000 pps
pull-in torque	50 g-cm or more / 200 pps	80 g-cm or more / 700 pps
Holding torque	65 g-cm or more	130 g-cm or more
Resistance per phase	2.6 Ω	15 Ω
Max pull-out pulse rate	765 pps or more	3000 pps or more
Max pull-in pulse rate	380 pps or more	1000 pps or more

CHARACTERISTICS:

5.2 V

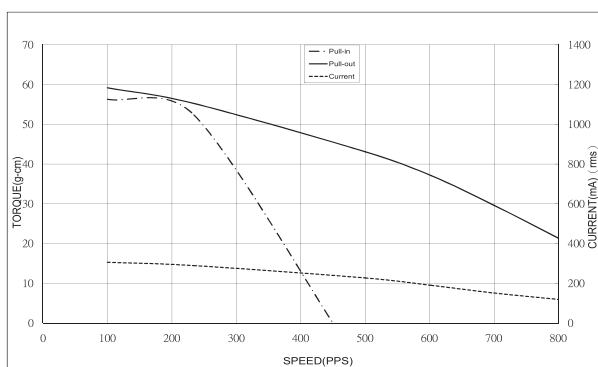

24 V

