



NEOCENE

2A2013 | SPECIFICATION



SUMMARY

D20 Motor is Converted to High Output

Torque via a Gear Box

Customizable Gearbox Deceleration Ratio

Halogen Free series available

USES

EV Charging Station

Aircondition

LED Light Control



Driving Recorder & Navigation

Projector

Automatic Inspection Equipment

Medical Equipment

➤ DIMENSIONS :

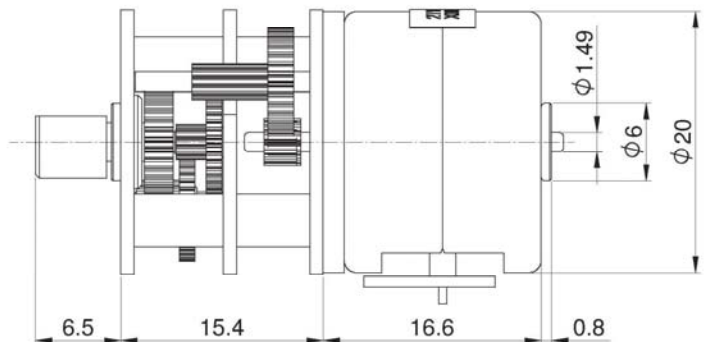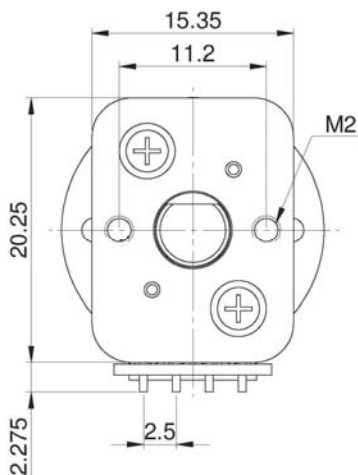



Item	2A2013
Standard voltage	24V
Standard Current	100 mA/Phase
Number of phase	4 Phase
Step angles	18° / Step(Output shaft 0.151° / Step)
Transmission ratio	1:119 (customization)
Excitation	2-2 Bipolar
Pull-out torque	1.2 kg-cm or more / 500 pps
Holding torque	2.5 kg-cm or more
Resistance per phase	20 Ω
Max pull-out pulse rate	2500 pps or more
Max pull-in pulse rate	700 pps or more

➤ CHARACTERISTICS :

24V

