



DIMENSIONS: UNIT:mm(inch)

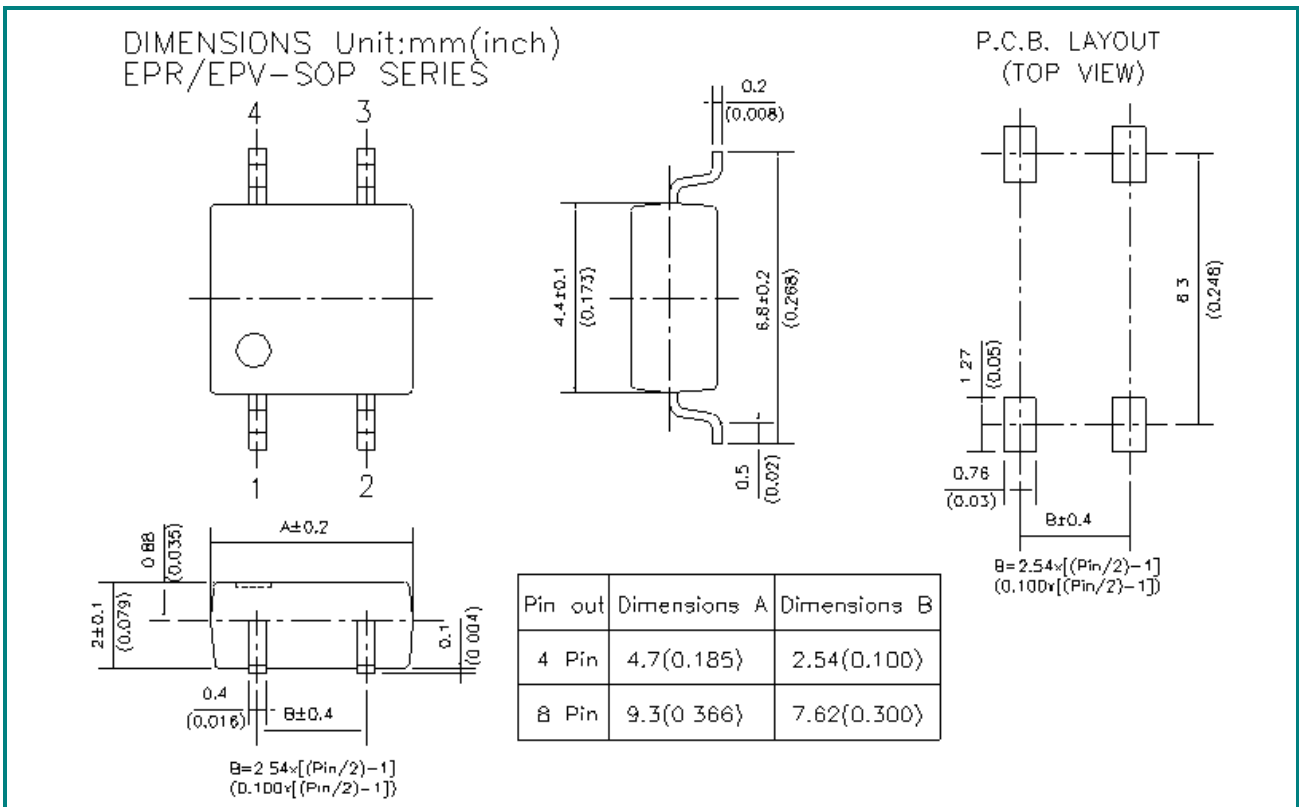

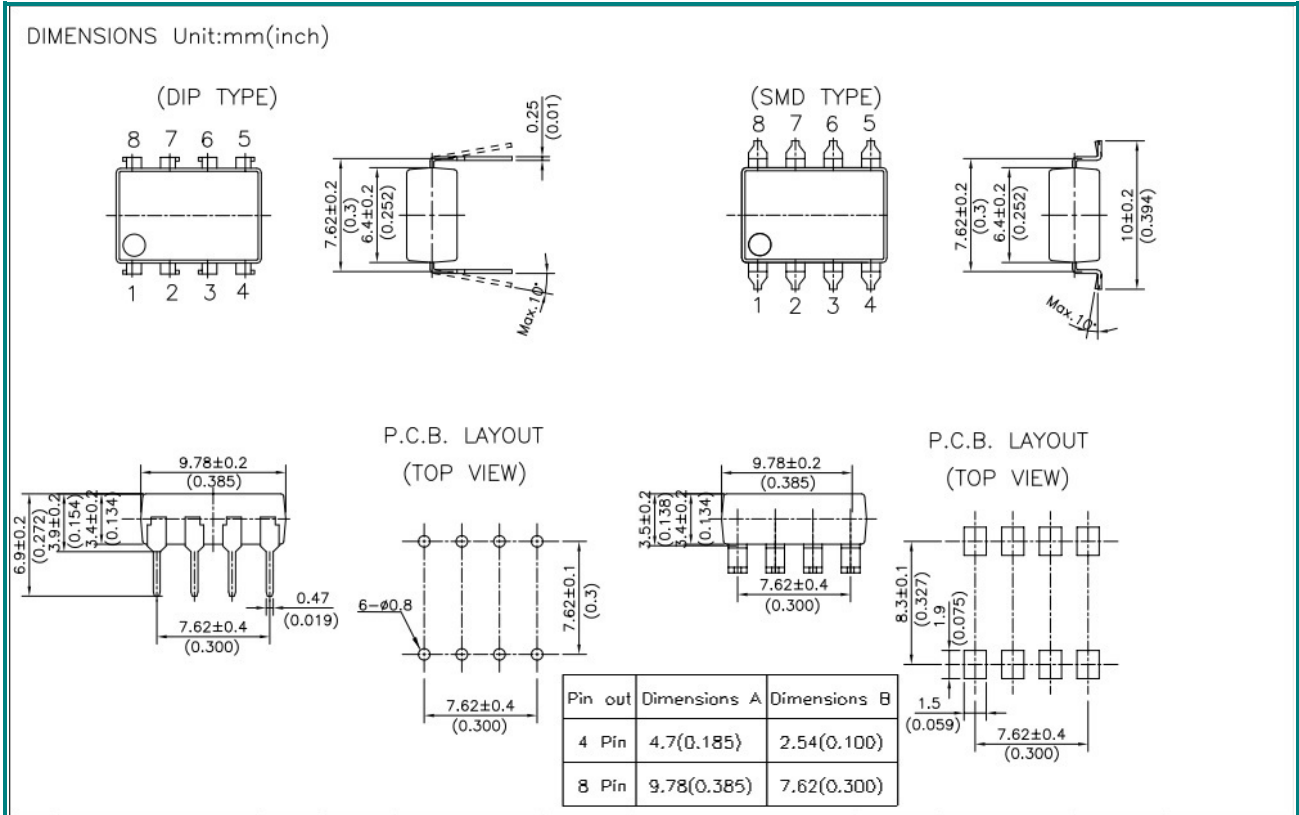

**Rely on ECE's Relays,
and You Always Relax!**

Part Number (4 PIN) (8 PIN)	DIP	EPV	191204000 191208000	291204000 291208000
	SMD		191304X00 191308X00	291304X00 291308X00
	SOP		191404X00 191408X00	291404X00 291408X00
Input Characteristics				
Forward voltage (V)(V _F)			0.9-1.5	0.9-1.5
Reverse voltage at 10μA (V)(V _R)			5	5
Control current (mA)(I _F)			10-50	10-50
Output Characteristics				
Open Voltage(V _{OC})			7	18
Short Current(I _{SC})			20	10
Turn-on (msec)(T _{ON})			0.2	0.2
Turn-off (msec)(T _{OFF})			0.05	0.05
Input / Output Characteristics				
I/O Isolation voltage (VAC)(V _{I/O})	SOP		2500	2500
	SMD/DIP		3750	3750
I/O Isolation resistance (GΩ)(R _{I/O})			10	10
Temperature limits	Operating (T _{OP})	-40°C to +85°C (-40°F to +185°F)		
	Storage (T _{STG})	-40°C to +100°C (-40°F to +212°F)		