



RESETTABLE FUSE

RADIAL LEADED PTC FT MODEL

 E175689


FEATURES

- Fast trip time, Lower trip-to-hold ratio.
- Radial-leaded product ideal for up to 36V
- Operation current: 0.5A~2.5A
- Maximum voltage: 36V
- Temperature range: -40°C to 85°C
- Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirement
- Bulk packaging, tape and reel available on most models


APPLICATIONS

- IEEE 1394 FireWire
- Computer & Consumer electronics


PART NUMBERING SYSTEM

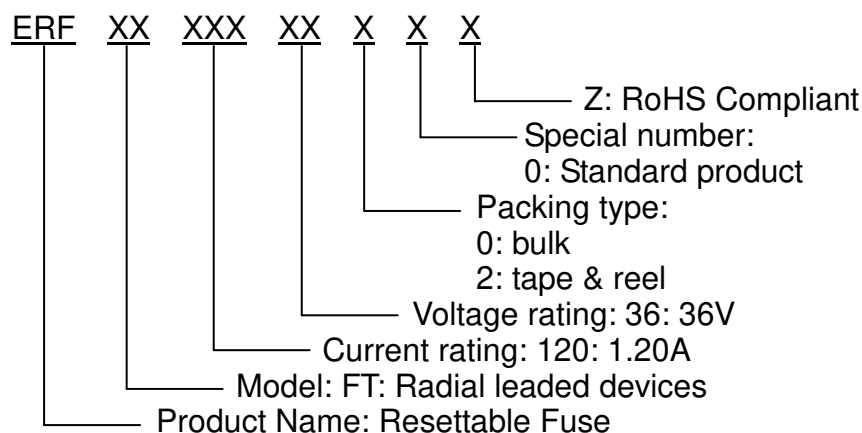

Marking system



Example

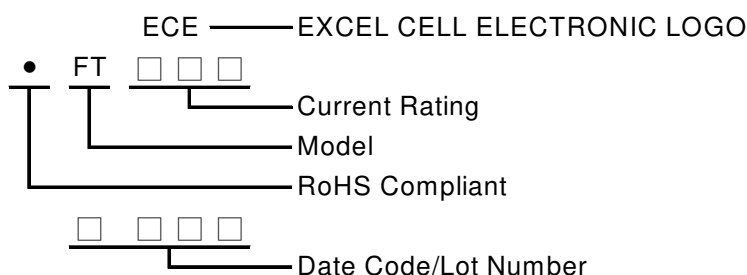

*If the current rating is under 1Amp there will be no "ECE" logo shown on the body.



RESETTABLE FUSE

■ Electrical characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Maximum Current	Rated Voltage	Typical Power	Resistance Tolerance	
							R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	Ω	Ω
FT050-36	0.50	1.00	5.0	40	36	0.67	0.140	0.448
FT075-36	0.75	1.50	4.0	40	36	0.71	0.115	0.368
FT090-36	0.90	1.80	3.5	40	36	0.74	0.090	0.288
FT120-36	1.20	2.30	3.5	40	36	0.78	0.074	0.180
FT135-36	1.35	2.50	4.5	40	36	0.84	0.059	0.143
FT160-36	1.60	2.75	4.5	40	36	0.86	0.041	0.131
FT190-36	1.90	3.00	3.5	40	36	0.90	0.045	0.092
FT220-36	2.20	3.50	6.5	40	36	0.95	0.025	0.080
FT250-36	2.50	4.00	8.0	40	36	0.99	0.020	0.064

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.

I_T=Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX}=Maximum voltage device can withstand without damage at rated current.


I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V max).

P_d=Typical power dissipated from device when in the tripped state in 23°C still air environment.

R_{MIN}=Minimum device resistance at 23°C.


R_{1MAX}=Maximum device resistance at 23°C 1 hour after tripping.

■ Typical Time-To-Trip at 23°C

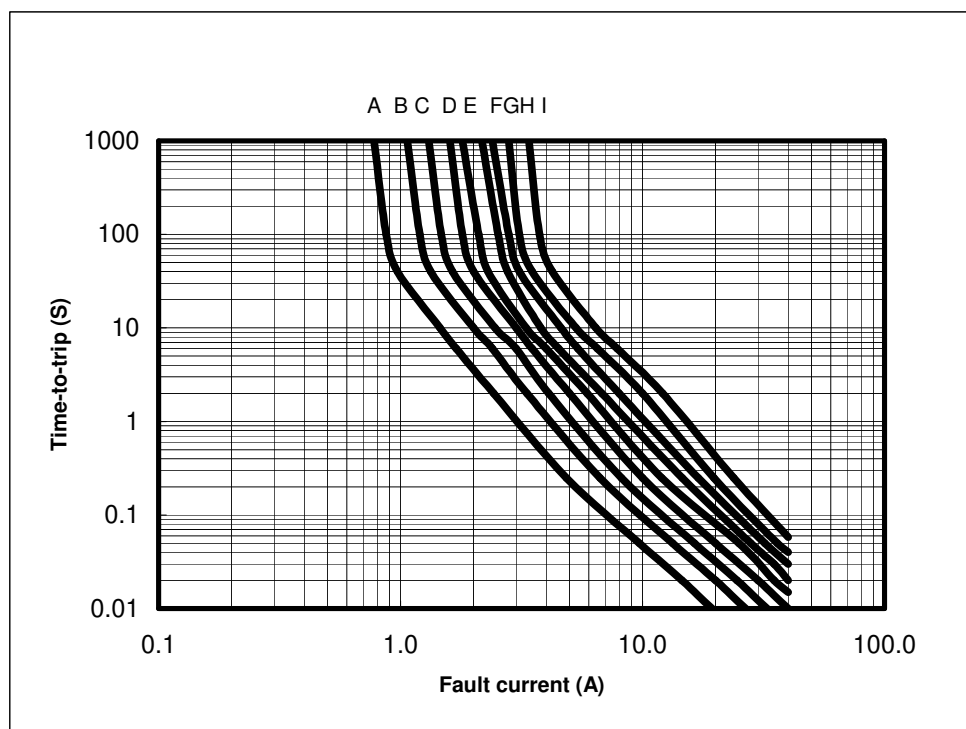


A=FT050-36
B=FT075-36
C=FT090-36
D=FT120-36
E=FT135-36
F=FT160-36
G=FT190-36
H=FT220-36
I=FT250-36

Thermal Derating Curve

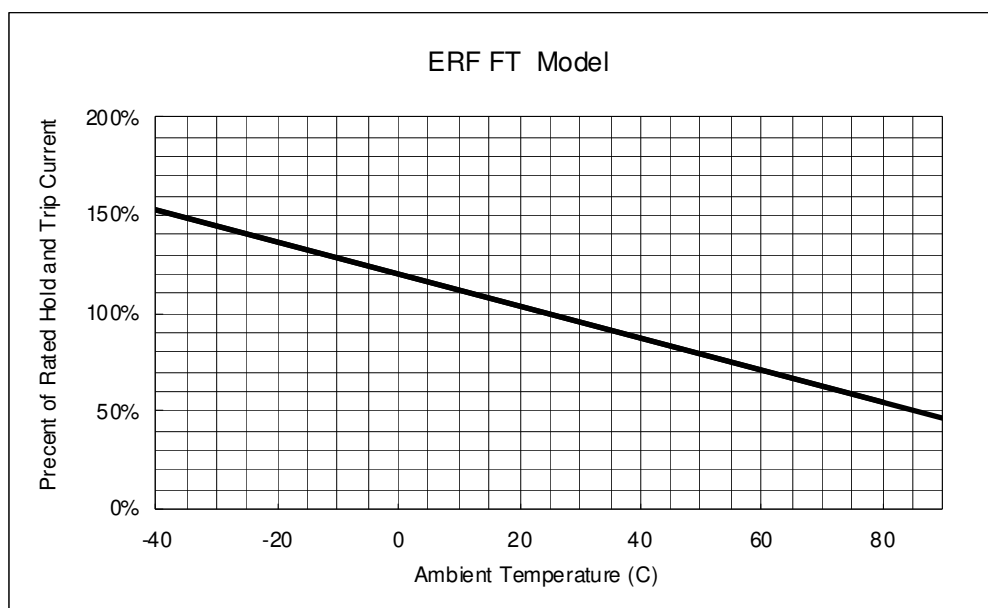

FT Product Dimensions (UNIT: mm)

Part Number	A	B	C	D	E	F
	Maximum	Maximum	Typical	Minimum	Maximum	Typical
FT050-36	7.4	12.2	5.1	7.6	3.0	1.1
FT075-36	7.4	12.2	5.1	7.6	3.0	1.1
FT090-36	7.4	12.2	5.1	7.6	3.0	1.1
FT120-36	7.4	12.2	5.1	7.6	3.0	1.1
FT135-36	7.4	14.2	5.1	7.6	3.0	1.1
FT160-36	7.4	14.0	5.1	7.6	3.0	1.1
FT190-36	9.0	13.5	5.1	7.6	3.0	1.1
FT220-36	10.0	17.5	5.1	7.6	3.0	1.1
FT250-36	10.0	19.5	5.1	7.6	3.0	1.1

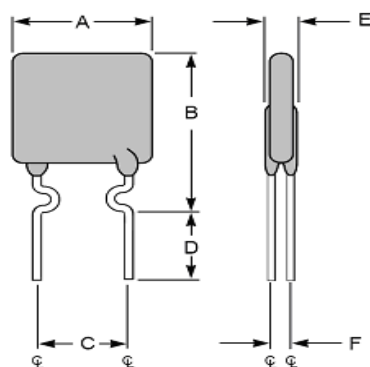

- Lead Size: 24AWG
- Φ0.51mm Diameter



■ **Standard Package for Reference**

P/N	Pcs/Bag	Reel/Tape	P/N	Pcs/Bag	Reel/Tape
FT050-36	500	3.0K	FT160-36	500	3.0K
FT075-36	500	3.0K	FT190-36	500	3.0K
FT090-36	500	3.0K	FT220-36	500	3.0K
FT120-36	500	3.0K	FT250-36	500	3.0K
FT135-36	500	3.0K			