

WIRE TO P.C.B. TYPE TERMINAL BLOCK

 Pending

ETB5D SERIES

BARRIER TYPE

PITCH=7.62mm

FEATURES


- Can be supplied in any number of positions
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Wide choice of pitch & terminal
- Top cover design to prevent screw detachment
- RoHS Compliant
- Halogen free series available

SPECIFICATIONS

- Pitch 7.62mm (0.3 inch)
- Wire range 16~22 AWG
- Rating 10 Amp, 300 VAC
- Housing material Thermoplastic (UL 94V-0) Black
- Terminals Tin plated over Brass
- Screws M3.0 x 0.5P, Zinc plated over Steel
- Dielectric strength 2000 VAC (Min.)
- Insulation resistance 1000 MΩ, 500 VDC




PART NUMBERING SYSTEM

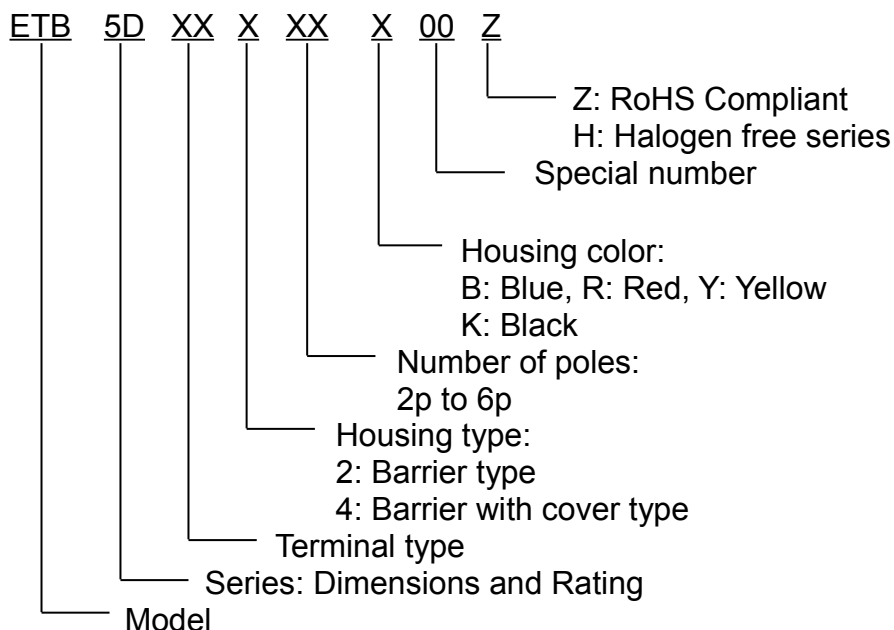

■ DRAWING (MOUNT TYPE)

ETB5D024**

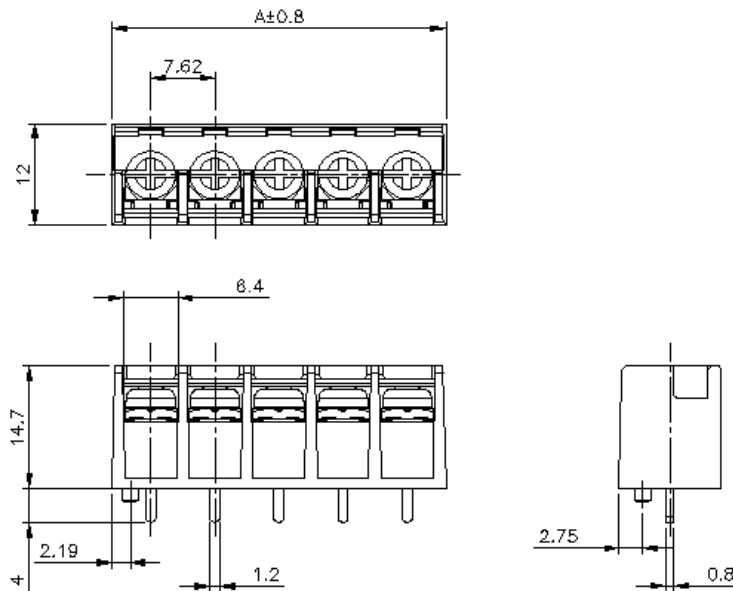

mm to inch

mm	0.8	1.2	2.19	2.75	4	6.4	7.62	12	14.7
inch	0.031	0.047	0.086	0.108	0.157	0.252	0.300	0.472	0.579

DIMENSIONS OF **BARRIER TYPE**

**NUMBER OF POLE 02~06.

POLE DIM.	2	3	4	5	6
$A \pm 0.8$	16.8 (0.661)	24.5 (0.965)	32.1 (1.264)	39.7 (1.563)	47.3 (1.862)